MARK	PLACES	ZONE	ECN	DATE

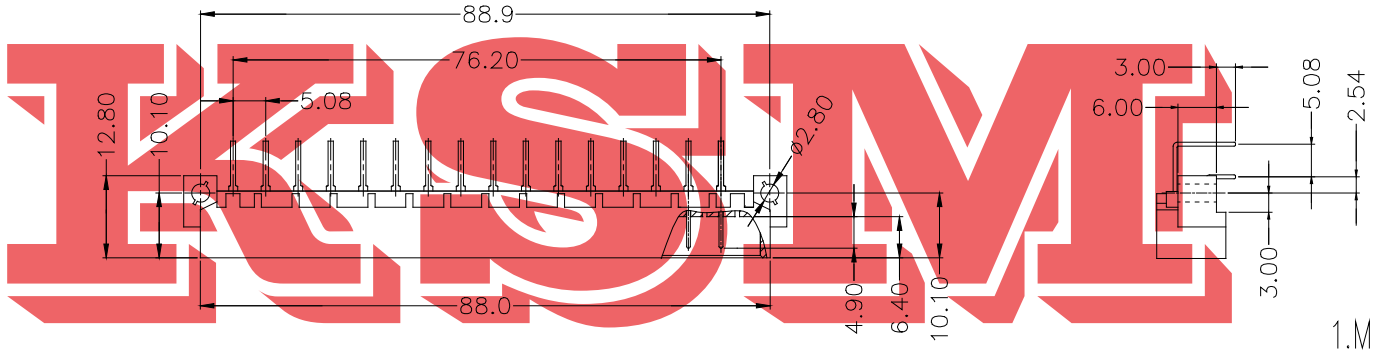

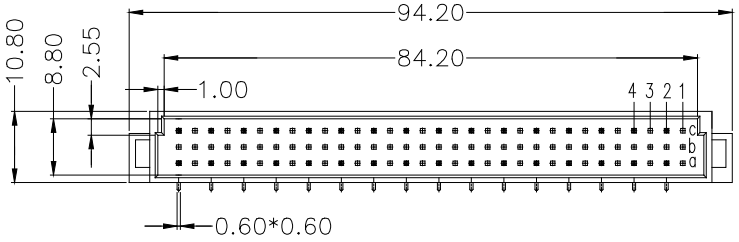

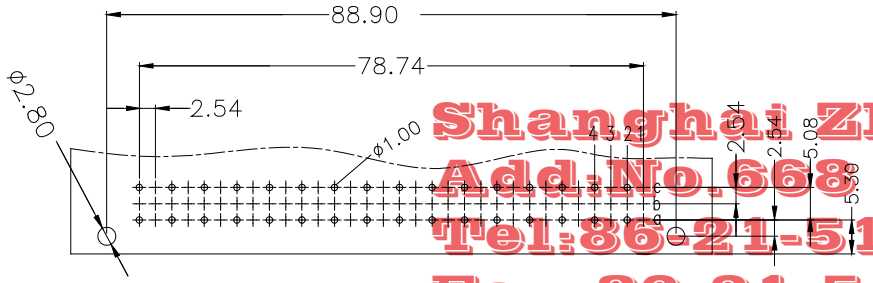

PCB LAYOUT(RECOMMENDED)

(TOP VIEW TOL.: ±0.05)

1.Material

Insulator body : Glass Filled therm oplastic UL94V-0

Contact : Phosphor Bronze

Contact plating : Gold

2.Electrical

Current rating : 2Amp

Dielectric withstanding : 1000 Megohms min.at 500V DC voltage

Insulation resistance : AC 500V for 1 minute

Contact rasistance : 20 Milliohms max

Operating tamperature : -55℃to+105℃

3.mechanical

soldering temerature : 260℃10seconds max

KSM
Shanghai ZhouRi Electronics.,CO.Ltd.
Add:No.668 Beijing East Road
Tel:86-21-51571121 53085565
Fax:86-21-51571120
Http:www.ksmchina.com
E-mail:zhouri119110163.com

UNLESS OTHERWISE SPECIFIED		9001-15321C	上海洲日电子有限公司 Shanghai ZhuoRi Electronics CO.,LTD.				
DIMENSION	TOLERANCE DECIMAL	ANGLE					
X.	±0.3	±1°	MODEL NO.	欧式插座	MATERIAL		FINISH	
X.X	±0.2	±0.5°						
X.XX	±0.1		DWG. NO.	ZR-DIN-006	COLOR		QUANTITY	
X.XXX	±0.05							
DESIGNED			Item NO.					
CHECKED			REV.	A	SCALE	1:1	UNIT	mm	SIZE	A4
APPROVED			THE THIRD ANGLE PROJECTION				SHEET	OF	PAGES	