



No:of Contacts	Dimension(mm)	
	A	B
2	1.27	2.54
3	2.54	3.81
4	3.81	5.08
5	5.08	6.35
6	6.35	7.62
7	7.62	8.89
8	8.89	10.16
9	10.16	11.43
10	11.43	12.70
11	12.70	13.97
12	13.97	15.24
13	15.24	16.51
14	16.51	17.78
15	17.78	19.05
16	19.05	20.32
17	20.32	21.59
18	21.59	22.86
19	22.86	24.13
20	24.13	25.40
21	25.40	26.67
22	26.67	27.94
23	27.94	29.21
24	29.21	30.48
25	30.48	31.75
26	31.75	33.02
27	33.02	34.29
28	34.29	35.56
29	35.56	36.83
30	36.83	38.10
31	38.10	39.37
32	39.37	40.64
33	40.64	41.94
34	41.94	43.18
35	43.18	44.45
36	44.45	45.72
37	45.72	46.99
38	46.99	48.26
39	48.26	49.53
40	49.53	50.80
41	50.80	52.07
42	52.07	53.34
43	53.34	54.61
44	54.61	55.88
45	55.88	57.15
46	57.15	58.42
..
50	62.23	63.50

MARK	PLACES	ZONE	ECN	DATE

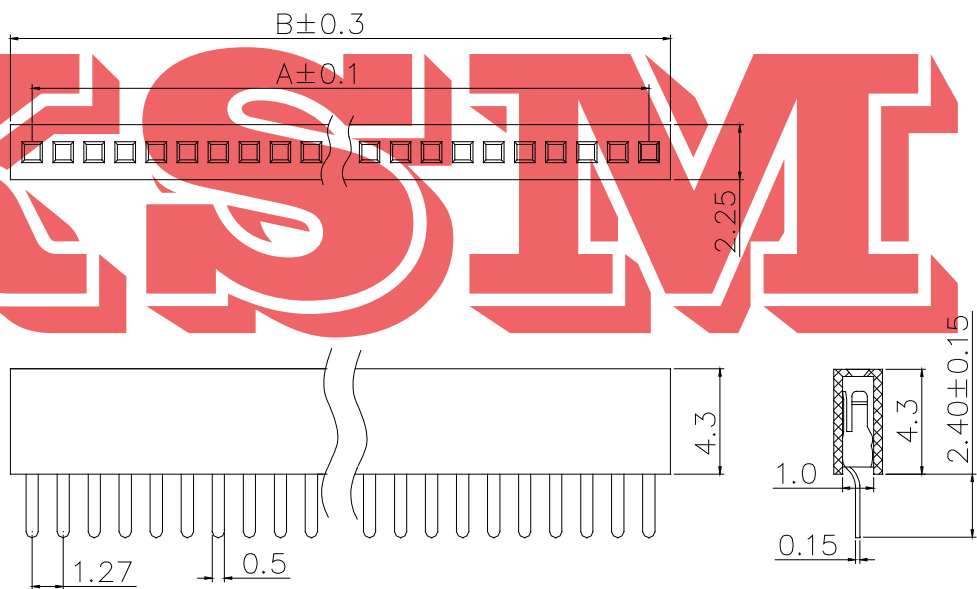

MATERIAL:
 INSULATOR : PBT,(UL 94V-0)
 CONTACT : COPPER ALLOY,t=0.4mm
 CONTACT FINISH : GOLD OVER NICKEL

SPECIFICATION:
 CURRENT RATING : 3AMP
 DIELECTRIC WITHSTANDING VOLTAGE : 1000V AC PER MINUTE
 INSULATION RESISTANCE : 1000MΩ MIN.
 CONTACT RESISTANCE : 30mΩMAX.
 OPERATING TEMPERATURE : -55℃~+105℃.

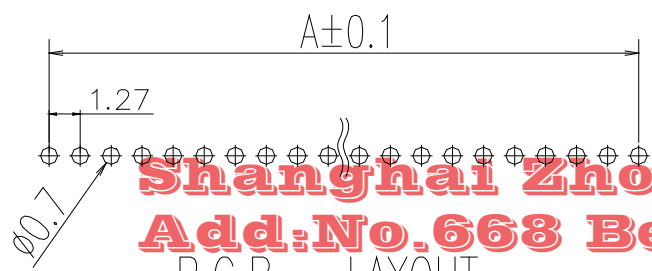

03	XX	I	100	X	03
No. of pins per Row	Connector Type	Con tact Plating	Insulator Material	spacs	
2×40	l= Straight	100=G/F 0.8u"	Option	01=2.54mm	02=2.0mm
2-80	L=Right Angle	101=1u"	A:BK-PBT	03=1.27mm	
	S=S.M.T	102=3u"	B:BK-PA66		
		103=5u"	C:BK-PA6T		
			D:BK-PA46		
			E:BK-LCP		
			F:special		

Shanghai ZhouRi Electronics., CO Ltd.
Add: No. 668 Beijing East Road
Tel: 86-21-51571121 53085565
Fax: 86-21-51571120
Http: www.ksmchina.com
E-mail: zhouri119110163.com

UNLESS OTHERWISE SPECIFIED TOLERANCE			1.27mm Female Header, Dual Row, Straight		上海洲日电子有限公司			
DIMENSION	DECIMAL	ANGLE	MODEL NO.	Female Header	MATERIAL	Shanghai ZhuoRi Electronics CO.,LTD.		
X.X	±0.2	±0.5°	DWG. NO.	ZR-Female Header-008	COLOR	FINISH		
X.XX	±0.1		DESIGNED	Item NO.		QUANTITY		
X.XXX	±0.05		CHECKED	REV.	A	SCALE	1:1	UNIT mm
			APPROVED	THE THIRD ANGLE PROJECTION			SHEET OF	PAGES