


MARK	PLACES	ZONE	ECN	DATE

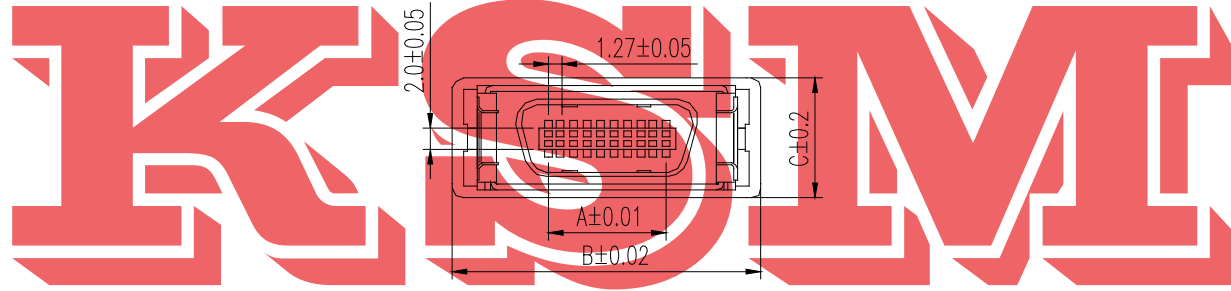



NOTE:

- 1.0 CONNECTOR ELECTRICAL CHARACTERISTICS:
- 1.1 CONTACT CURRENT RATING: 1.0 AMPERE
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 500 V r.m.s
- 1.3 INSULATION RESISTANCE:500 MEGOHMS Min.
- 1.4 CONTACT RESISTANCE:35 MILLOHMS Max.
- 1.5 OPERATING TEMPERATURE: -55℃ TO +85℃

2.0 OTHERS:

- 2.1 EACH PART ARE PACKAGED UNASSEMBLED
- 2.2 SPRING LATCH: STAINLESS
- 2.3 COAT:THERMOPLASTIC WITH GLASS-FIBER FILLED,
UL 94V-0 RATED
- 2.4 MATERIALS & FINISH OF CONNECTOR BODY
SEE TABLE A ITEM 6.7.8
- 2.5 APPLICATION:
WIRE GAUGE 30 AWG(0.05mm) OR 28 AWG(0.08mm)
- 2.6 ITEM 4.5 ARE ASSEMBLY
ITEM 6.7.8 ARE ASSEMBLY
OTHERS ARE ATTACH

2.70±0.15

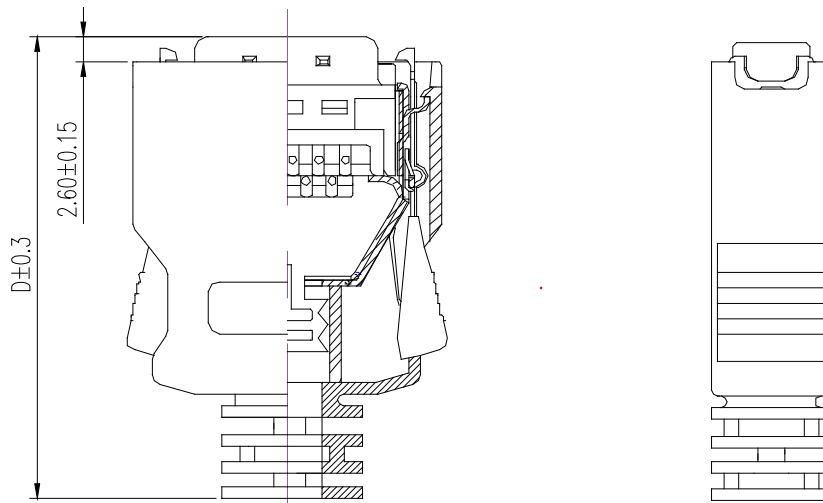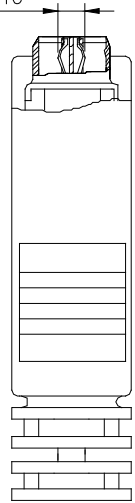

POSITION	A±0.10	B±0.20	C±0.20	D±0.30
14pin	7.70	26.20	11.90	41.50
20pin	11.50	30.00	12.30	44.10
26pin	15.30	33.60	11.60	42.00
36pin	21.60	40.00	12.00	44.00
50pin	30.50	48.30	12.00	44.10

Shanghai ZhouRi Electronics CO.,Ltd.

Add:No.668 Beijing East Road

Tel:86-21-51571121 53085565

Fax:86-21-51571120

Http:www.ksmchina.com

E-mail:zhouri1101163.com



TYPE OF CABLE EXIT DIM

UNLESS OTHERWISE SPECIFIED		HALF-PITCH RIBBON CONNECTOR				上海洲日电子有限公司 Shanghai ZhuoRi Electronics CO.,LTD.						
DIMENSION TOLERANCE		MALE, WITH PLASTIC HOOD. DNE-TOUCH-LOCK.20POS (CUSTOMER DRAWING)										
DECIMAL	ANGLE	DECIMAL	ANGLE	MODEL NO.	SCSI	MATERIAL	FINISH					
X.X	±0.3	X.X	±0.5	DWG. NO.	ZR-SCSI-001	COLOR	QUANTITY					
X.XX	±0.1	X.XX	±0.1	DESIGNED	Item NO.							
X.XXX	±0.05	X.XXX	±0.05	CHECKED	REV.	A	SCALE	1:1	UNIT	mm	SIZE	A4
APPROVED					THE THIRD ANGLE PROJECTION				SHEET OF PAGES			