




端子 TERMINAL(SAN)

安装尺寸 MOUNTING MEASUREMENT

MARK	PLACES	ZONE	ECN	DATE

型号 Type	适用线规 Applicable wires		电线外径 O.D of wire ins mm
	mm ²	AWG#	
HX20008-PT	0.05~0.22	30~24	0.9~1.3

HX20008-PT(SAN)

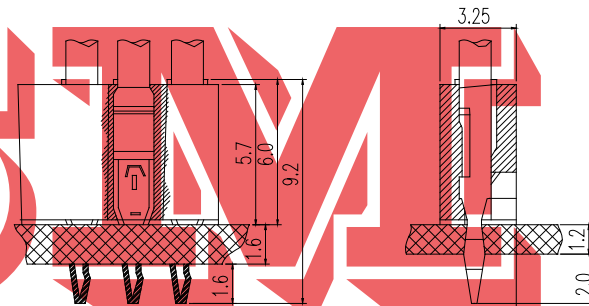

技术参数 SPECIFICATIONS

线数 (Poles) 2~30

适用线规(Applicable wires): AWG30#~24#

适应基板厚度(Applicable PC board thickness): 1.2~1.6mm

温度范围(Temperature range): -25℃~85℃

额定电压(Voltage rating): 250V Ac/Dc

额定电流(Current rating): 2A

接触电阻(Contact resistance): $\leq 0.02\Omega$

绝缘电阻(Insulation resistance): >math>\geq 1000M\Omega</math>

耐压(Withstand voltage): 800V.Ac/1min


材料(Material):

壳体(Housing): 尼龙(Nylon)UL94V-2(0)

端子(Terminal) 磷青铜(Phos.bronze Tin/plated)

HX20008-Y(SAN)

壳体 HOUSING(SAN)

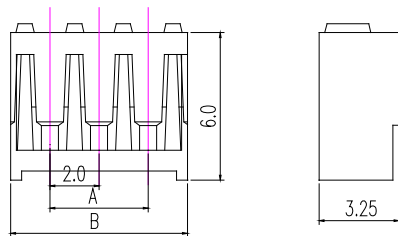

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	HX20008-2Y	2.0	5.2
3	HX20008-3Y	4.0	7.2
4	HX20008-4Y	6.0	9.2
5	HX20008-5Y	8.0	11.2
6	HX20008-6Y	10.0	13.2
7	HX20008-7Y	12.0	15.2
8	HX20008-8Y	14.0	17.2
9	HX20008-9Y	16.0	19.2
10	HX20008-10Y	18.0	21.2
11	HX20008-11Y	20.0	23.2
12	HX20008-12Y	22.0	25.2
13	HX20008-13Y	24.0	27.2
14	HX20008-14Y	26.0	29.2
15	HX20008-15Y	28.0	31.2
..
30	HX20008-30Y	58.0	61.2

Shanghai ZhouRi Electronics.,CO.Ltd.

Add.No.668 Beijing East Road

Tel:86-21-51571121 53085565

Fax:86-21-51571120

Http://www.ksmchina.com

E-mail:zhouri119@163.com

UNLESS OTHERWISE SPECIFIED		(SAN)Pressure		上海洲日电子有限公司	
TOLERANCE		Welding Bar Connector		Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION	DECIMAL	ANGLE	MODEL NO.	MATERIAL	FINISH
X.X	±0.3	±0.5°	间距(Pitch):2.0mm(.079")		
X.XX	±0.2		DWG. NO.	COLOR	QUANTITY
X.XXX	±0.1		ZR-Connector-012		
DESIGNED	Item NO.				
CHECKED	REV.	A	SCALE	1:1	UNIT mm SIZE A4
APPROVED	THE THIRD ANGLE PROJECTION		SHEET OF PAGES		