

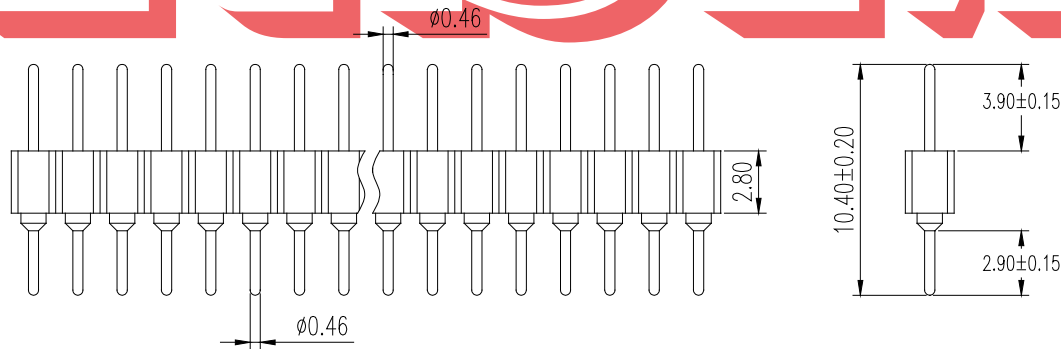


MARK	PLACES	ZONE	ECN	DATE

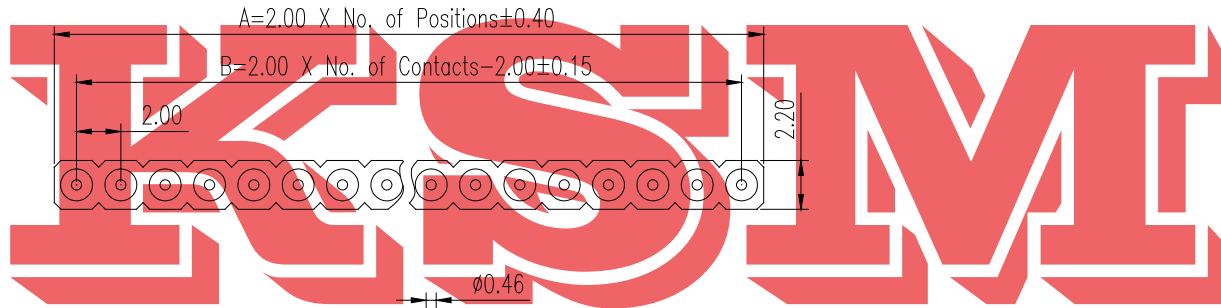

P.C.B LAYOUT

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ”Ni, 5μm/200μ”Sn

Gold Plated:2μm/80μ”Ni,0.8 μ ” gold

Insulator(black): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: <4mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55℃ to+105℃

Tin plated:-40℃ to+105℃

Soldering temperature: +260℃,10s max

Shanghai ZhouRi Electronics.,CO.Ltd.

Add:No.668 Beijing East Road

Tel:86-21-51571121 53085565

Fax:86-21-51571120

Http://www.ksmchina.com

E-mail:zhouri119110163.com

07	XX	X	X	X	X	X	XXXXX
No. of Positions XX Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Clip plated	Pin length(mm)	
0 No	1 1.27mm	1 1.90mm	1 Single row	0 No	0 No	1040A 10.40mm	
1 1.27mm	2 2.00mm	2 2.00mm	2 Double row	1 Tin150μ	1 Tin150μ	Special	
2 2.54mm	3 2.80mm	3 2.80mm	3 Open from	2 Tin200μ	2 Tin200μ		
3 7.62mm	4 3.00mm	4 3.00mm	4 W/o bar	3 G/F	3 G/F		
4 10.16mm	5 4.00mm	5 4.00mm	5 Special	4 Gold3μ	4 Gold3μ		
6 15.24mm	6 7.00mm	6 7.00mm		5 Gold10μ	5 Gold10μ		
9 22.86mm				6 Gold15μ	6 Gold15μ		
S Special				S Special	S Special		

UNLESS OTHERWISE SPECIFIED			2.0mmPitch SIP Sockets		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION TOLERANCE			Single Row Straight			
			Pin Length 10.40mm			
X.X ±0.2			X.XX ±0.3		MODEL NO. ZR-IC-019	
X.XXX ±0.1			X.XXX ±0.05		MATERIAL FINISH	
DESIGNED			Item NO.		COLOR QUANTITY	
CHECKED			REV. A		SCALE 1:1	
APPROVED			THE THIRD ANGLE PROJECTION		UNIT mm SIZE A4	
					SHEET OF PAGES	