
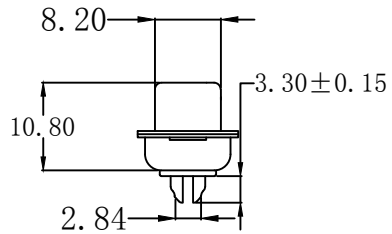


Material
 Insulator: Glass filled PBT, (UL 94V-0)
 Contact : Brass
 Electrical Characteristics
 Current rating: 3AMP
 Dielectric Withstanding Voltage: AC 500V for 1 Minute.
 Insulator Resistance: 1000MΩ Min. AT DC 500V.
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -45 °C ~ +105 °C

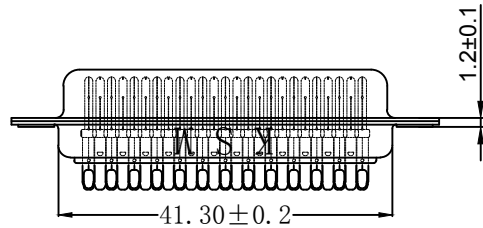

		D-SUB-25M	上海洲日电子有限公司	
			Shanghai Zhouri Electronics CO.,LTD	
			上海康司玛电子设备进出口有限公司	
			Shanghai KangSiMa Electronic Equipment import and export Co.,LTD	
绘图:	MAXIA	日期: 20150623	tel:021-51571121	http://www.zhouri.net
审核:	FANHUA	日期: 20150628	fax:021-51571120	http://www.ksmchian.com
版本编号:	ZRLCGY2015-05-01-CJ		产品名称:	Solder Type DB-25P Male
第三视角:		单位: mm	比例:	图幅: A4 页次 共 01 第 01