


MARK	PLACES	ZONE	ECN	DATE

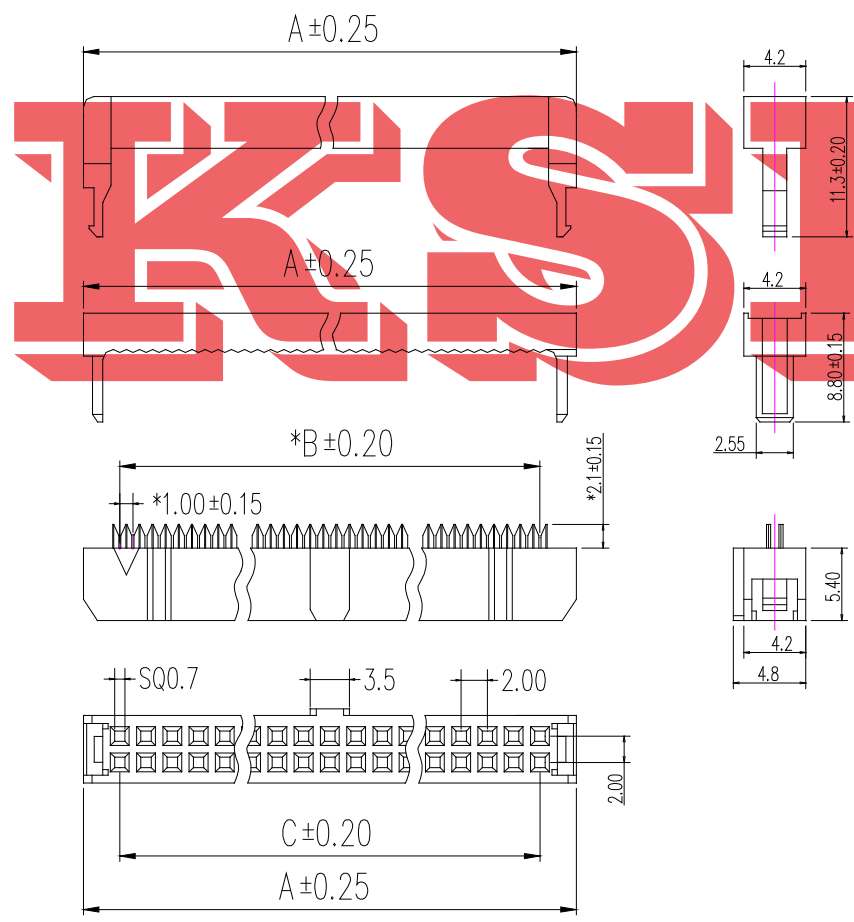

**\*MATERIAL:**  
 INSULATOR: PBT+GLASS FIBER(UL94V)-0.  
 CONTACT: COPPER ALLOY.  
 CONTACT PLATED: GOLD OR TIN OVER NICKEL PLATED.  
 ALL MATEEIAL ACCORD WITH ROHS.

**\*SPECIFICATION:**  
 WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE.  
 INSULATION RESISTANCE: 1000 MΩ MIN. AT DC 500V.  
 CONTACT RESISTANCE: 1Ω MAX..  
 OPERATING TEMPERATURE: -40℃~105℃

POS	Dim.A	Dim.C	Dim.B
6	11.20	5.00	4.00
8	13.20	7.00	6.00
10	15.20	9.00	8.00
12	17.20	11.00	10.00
14	19.20	13.00	12.00
16	21.20	15.00	14.00
18	23.20	17.00	16.00
20	25.20	19.00	18.00
24	29.20	23.00	22.00
26	31.20	25.00	24.00
30	35.20	29.00	28.00
34	39.20	33.00	32.00
40	45.20	39.00	38.00
44	49.20	43.00	42.00
50	55.20	49.00	48.00
60	65.20	59.00	58.00
64	69.20	63.00	62.00
80	85.20	79.00	78.00

**Shanghai ZhouRi Electronics CO., Ltd.**  
**Add: No. 668 Beijing East Road**  
**Tel: 86-21-51571121 53085565**  
**Fax: 86-21-51571120**  
**Http: www.ksmchina.com**  
**E-mail: zhouri11@163.com**

UNLESS OTHERWISE SPECIFIED			2.0mm IDC Connector		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION TOLERANCE			Single Conot/with nose Dype			
DECIMAL	ANGLE		MODEL NO.	IDC	MATERIAL	FINISH
X.XX ±0.3	X.X ±1°		DWG. NO.	ZR-IDC-004	COLOR	QUANTITY
X.XXX ±0.1	X.XXX ±0.5		Item NO.			
X.XXX ±0.05			REV.	A/O	SCALE	1:1
DESIGNED			THE THIRD ANGLE PROJECTION			SHEET OF PAGES
CHECKED					UNIT	mm
APPROVED					SIZE	A4