

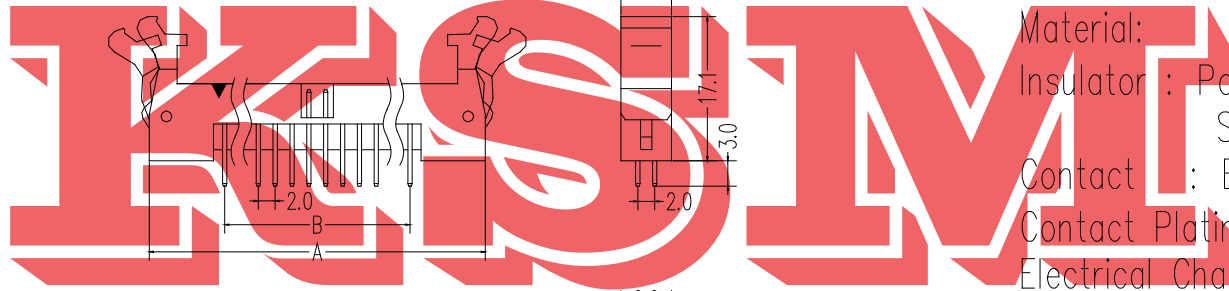
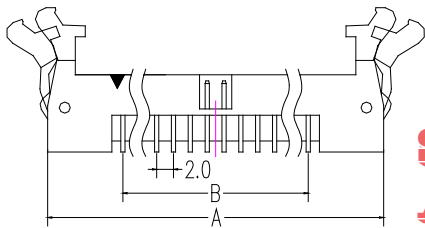


| MARK | PLACES | ZONE | ECN | DATE |
|------|--------|------|-----|------|
| | | | | |



Material:
 Insulator : Polyastot (UL94V-0)
 Standard.Hylon-66
 Contact : Brass.

Contact Plating: Au or Sn over 50u"Ni
 Electrical Characteristics:
 Current Rating : 1.5 AMP.
 Dielectric Withstanding Voltage: AC 1000V for 1minute.
 Insulator Resistance : 1000M Ω min.At DC 500V.
 Contact Resistance : 20m Ω max.At DC 100mA
 Operating Temperature : -40 $^{\circ}$ C ~ +105 $^{\circ}$ C.


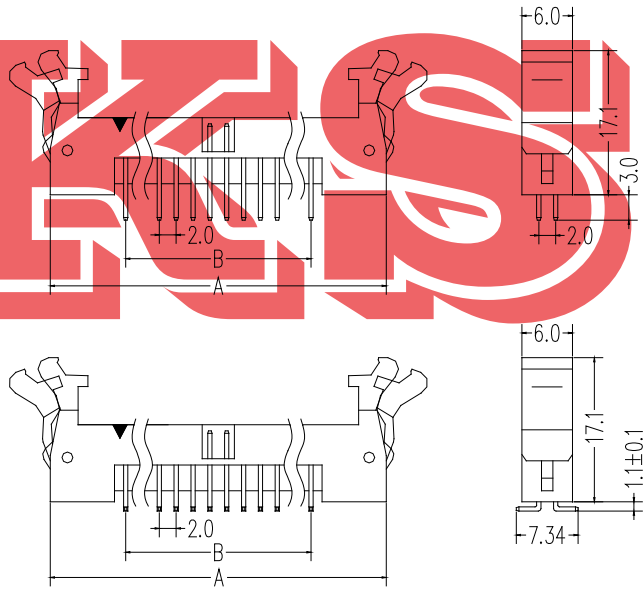


Order Information:

| | | | | | | | |
|---------------------------------|----------------------------------|--|--|---|---|---|---|
| 05 | 1 | X | I | 100 | X | 02 | Z |
| Color Type 1=Black 2=Gray | No.of pins per Row 6-64 | Connector Type I=Straight L=Right Angle S=S.M.T | Con tact Plating 100=G/F 0.8u" 101=1u" 102=3u" 103=5u" | Insulator Material Option A: BK-PBT B: BK-PA66 C: BK-PA6T D: BK-PA46 E: BK-LCP F: speical | spacs 01=2.54mm 02=2.0mm 03=1.27mm | Latch Type Z=LongLatch X=ShortLatch C=WithoutLatch | |

Shanghai ZhouRi Electronics, CO.,Ltd.
Add:No.668 Beijing East Road
Tel:86-21-51571121 53085565

Fax:86-21-51571120
Http://www.ksmchina.com
E-mail:zhouri119110163.com



| | | | | | |
|----------------------------|-----------|--|------------|--|----------|
| UNLESS OTHERWISE SPECIFIED | | 2.00mm EjectorHeader, Straight/Right Angle/S.M.T | | 上海洲日电子有限公司 Shanghai ZhuoRi Electronics CO.,LTD. | |
| DIMENSION | TOLERANCE | DECIMAL | ANGLE | MATERIAL | FINISH |
| X.X | ±0.3 | | ±0.5° | COLOR | QUANTITY |
| X.XX | ±0.1 | MODEL NO. | DC2#角 | | |
| X.XXX | ±0.05 | DWG. NO. | ZR-DC2-005 | | |
| DESIGNED | | Item NO. | | | |
| CHECKED | | REV. | A | SCALE | 1:1 |
| APPROVED | | THE THIRD ANGLE PROJECTION | | SHEET | OF |
| | | | | UNIT | mm |
| | | | | SIZE | A4 |
| | | | | PAGES | |