

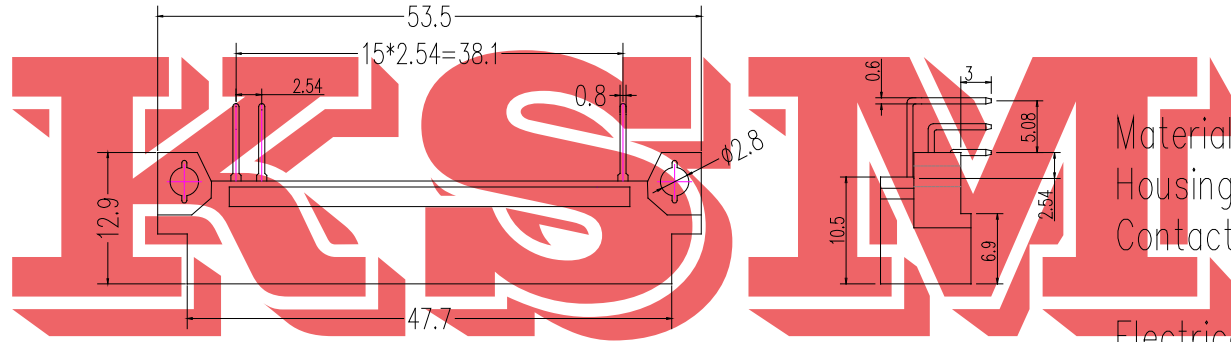


MARK	PLACES	ZONE	ECN	DATE

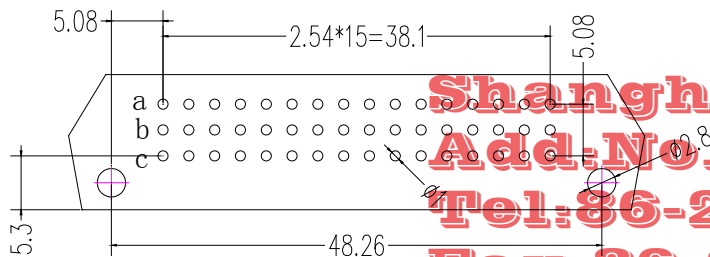

Material:  
Housing: 30%Glass filled PBT UL94V-0.  
Contacts: Phosphor Bronze.

Electrical Characteristics:  
Current Rating : 2 AMP.  
Dielectric Withstanding Voltage : AC 1000V for 1minute.  
Insulator Resistance : 1000M $\Omega$  min. At DC 500V.  
Contact Resistance : 30m $\Omega$ max. At DC 100mA.  
Operating Temperature : -55 $^{\circ}$ C ~ +105 $^{\circ}$ C.

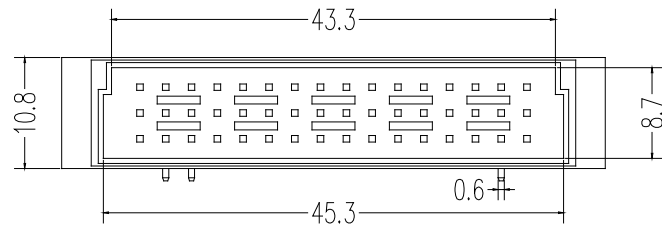

Number of contacts	Contact arrangement	Part NO.
48	a. b. c	9001-15481C
32	d. e. c	9001-15481C

**Shanghai ZhouRi Electronics, CO. Ltd.**

**Add: No. 668 Beijing East Road**

**Tel: 86-21-51571121 53085565**

**Fax: 86-21-51571120**

**Http: www.ksmchina.com**

**E-mail: zhouri119110163.com**

PCB LAYOUT (RECOMMENDED)

(TOP VIEW TOL.:  $\pm 0.05$ )

UNLESS OTHERWISE SPECIFIED TOLERANCE			9001-15481C		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION	DECIMAL	ANGLE	MODEL NO.	欧式插座	MATERIAL	FINISH
X.X	$\pm 0.2$	$\pm 0.5^{\circ}$	DWG. NO.	ZR-DIN-032	COLOR	QUANTITY
X.XX	$\pm 0.1$		DESIGNED	Item NO.		
X.XXX	$\pm 0.05$		CHECKED	REV.	A	SCALE
			APPROVED			
			THE THIRD ANGLE PROJECTION		1:1	
			SHEET OF PAGES		UNIT mm SIZE A4	