


MARK	PLACES	ZONE	ECN	DATE



端子 TERMINAL(4018/3.96)

型号 Type	适用线规 Applicable wires mm ² AWG#	电线外径 O.D of wire ins mm	材料厚度 Thickncss mm
HX39602-PTA	0.2~0.75 24~18	1.7~2.8	0.3
HX39602-PTB	0.2~0.75 24~18	1.7~2.8	0.25



HX39602-PT(4018/3.96)

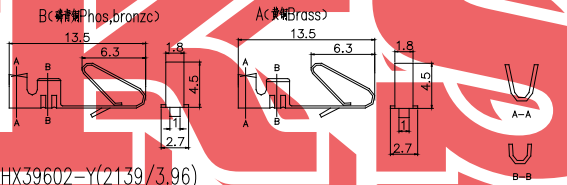



HX39602-Y(2139/3.96)





HX39603-NA(5276/3.96)





HX39603-A(5273/3.96)






HX39603-WAP(5274/3.96)



HX39603-WAG(5274/3.96)



安装尺寸 MOUNTING MEASUREMENT

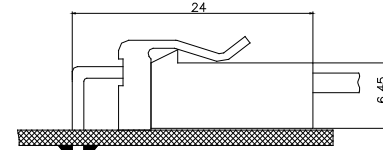

针座 HOUSING(2139/3.96)

线数 Poles	型号 Type	尺寸Dimensions (mm)	
		A	B
2	HX39602-2Y	3.96	8.52
3	HX39602-3Y	7.92	12.48
4	HX39602-4Y	11.88	16.44
5	HX39602-5Y	15.84	20.40
6	HX39602-6Y	19.80	24.36
7	HX39602-7Y	23.76	28.32
8	HX39602-8Y	27.72	32.28
9	HX39602-9Y	31.68	36.24
10	HX39602-10Y	35.64	40.20
11	HX39602-11Y	39.60	44.16
12	HX39602-12Y	43.56	48.12
13	HX39602-13Y	47.52	52.08
14	HX39602-14Y	51.48	56.04
15	HX39602-15Y	55.44	60.00
16	HX39602-16Y	59.40	63.96

技术参数 SPECIFICATIONS

线数 (Poles):2~16

适用线规(Applicable wires):AWG24#~28#

适应基板厚度(Applicable PC board thickness):1.6mm

温度范围(Temperature range):-25℃~85℃

额定电压(Voltage rating):250V Ac/Dc

额定电流(Current rating):5A

接触电阻(Contact resistance):<0.015Ω

绝缘电阻(Insulation resistance):≥1000MΩ

耐压(Withstand voltage):1500V.Ac/1min

材料(Material):

孔座(Housing): 尼龙 (Nylon) UL94V-2

针座(Wafer): 尼龙(Nylon) UL94V-2

端子(Terminal) 磷青铜(Phos.bronze Tin/plated)

黄铜 (Brass Tin/plated)

针座 WAFER(5373/5274/5276/3.96)

线数 Poles	型号 Type		尺寸Dimensions(mm)		
	直式(180°)	弯式(90°)	A	B	C
2	HX39603-2A/WA	HX39603-2NA	3.96	7.92	7.77
3	HX39603-3A/WA	HX39603-3NA	7.92	11.88	11.73
4	HX39603-4A/WA	HX39603-4NA	11.88	15.84	15.69
5	HX39603-5A/WA	HX39603-5NA	15.84	19.80	19.65
6	HX39603-6A/WA	HX39603-6NA	19.80	23.76	23.61
7	HX39603-7A/WA	HX39603-7NA	23.76	27.72	27.57
8	HX39603-8A/WA	HX39603-8NA	27.72	31.68	31.53
9	HX39603-9A/WA	HX39603-9NA	31.68	35.64	35.49
10	HX39603-10A/WA	HX39603-10NA	35.64	39.60	39.45
11	HX39603-11A/WA	HX39603-11NA	39.60	43.56	43.41
12	HX39603-12A/WA	HX39603-12NA	43.56	47.52	47.37
13	HX39603-13A/WA	—————	47.52	51.48	—————
14	HX39603-14A/WA	—————	51.48	55.44	—————
15	HX39603-15A/WA	—————	55.44	59.40	—————
16	HX39603-16A/WA	—————	59.40	63.36	—————

Shanghai ZhouRi Electronics Co., Ltd.
 Add: No. 663 Beijing East Road
 Tel: 86-21-51571121 53085565
 Fax: 86-21-51571120
 Http://www.zsmchina.com
 E-mail: zhouri119110163@163.com

UNLESS OTHERWISE SPECIFIED	TOLERANCE	
DIMENSION	DECIMAL	ANGLE
X.X	±0.2	±0.5°
X.XX	±0.1	—————
X.XXX	±0.05	—————
DESIGNED	Item NO.	
CHECKED	REV.	A
APPROVED	THE THIRD ANGLE PROJECTION	

<2319/3.96> Pressure
 Welding Bar Connector
 MODEL NO. 规格(Pitch):3.96mm(1.56")
 DWG. NO. ZR-Connector-018

上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.		MATERIAL	FINISH
COLOR	QUANTITY	UNIT	SIZE
mm	A4	mm	A4
SHEET	OF	PAGES	