

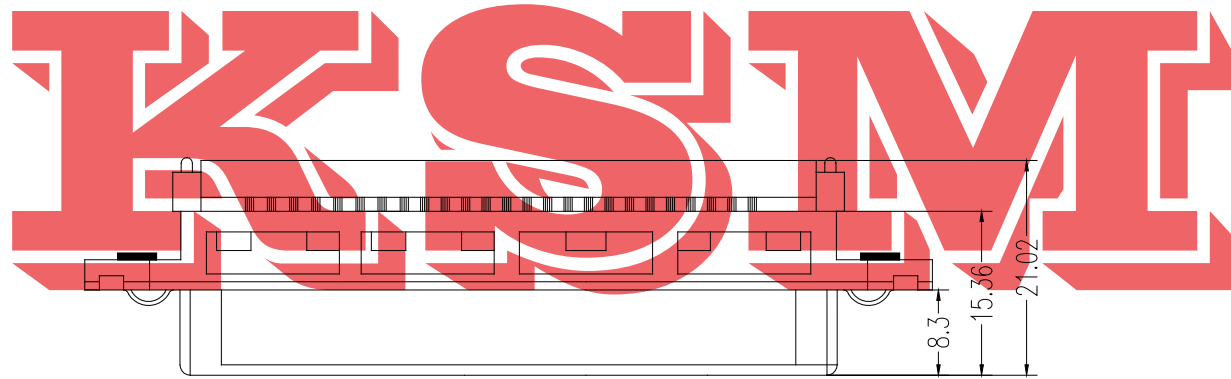


MARK	PLACES	ZONE	ECN	DATE



NOTE
MATERIAL
INSULATOR: PBT +30%GF
CONTACTS:BRASS
SHELL: SPCD
CONTACT PLATING: GOLD PLATING OVER NICKEL
ELECTRICAL SPECIFICATION
CURRENT RATING: 3A;
VOLTAGE RATING: 40V;
CONTACT RESISTANCE: 20mΩ MAX.
INSULATION RESISTANCE:3000MΩ MIN 500V DC.
DIELECTRIC WITHSTANDING VOLTAGE:1000V AC.
ENVIRONMENTA
OPERRATING TEMPERATURE: -50℃~105℃.

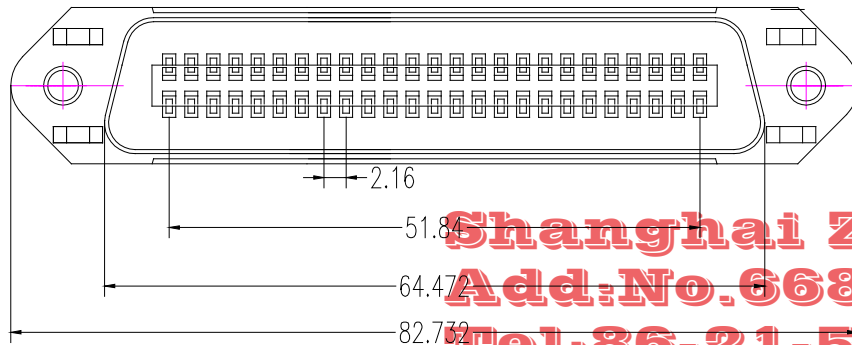

Shanghai ZhouRi Electronics.,CO.Ltd.
Add.No.668 Beijing East Road
Tel:86-21-51571121 53085565

Fax:86-21-51571120
Http:www.ksmchina.com
E-mail:zhouri11@163.com

UNLESS OTHERWISE SPECIFIED		TOLERANCE		57F40500压排式		上海洲日电子有限公司	
DIMENSION	DECIMAL	ANGLE				Shanghai ZhuoRi Electronics CO.,LTD.	
X.X	±0.2	±0.5°				MATERIAL	FINISH
X.XXX	±0.1					COLOR	QUANTITY
X.XXX	±0.05						
DESIGNED				MODEL NO.	57		
CHECKED				DWG. NO.	ZR-57-023		
APPROVED				Item NO.			
				REV.	A	SCALE	1:1
						UNIT	mm
						SIZE	A4
				THE THIRD ANGLE PROJECTION		SHEET	OF
						PAGES	