


MARK	PLACES	ZONE	ECN	DATE

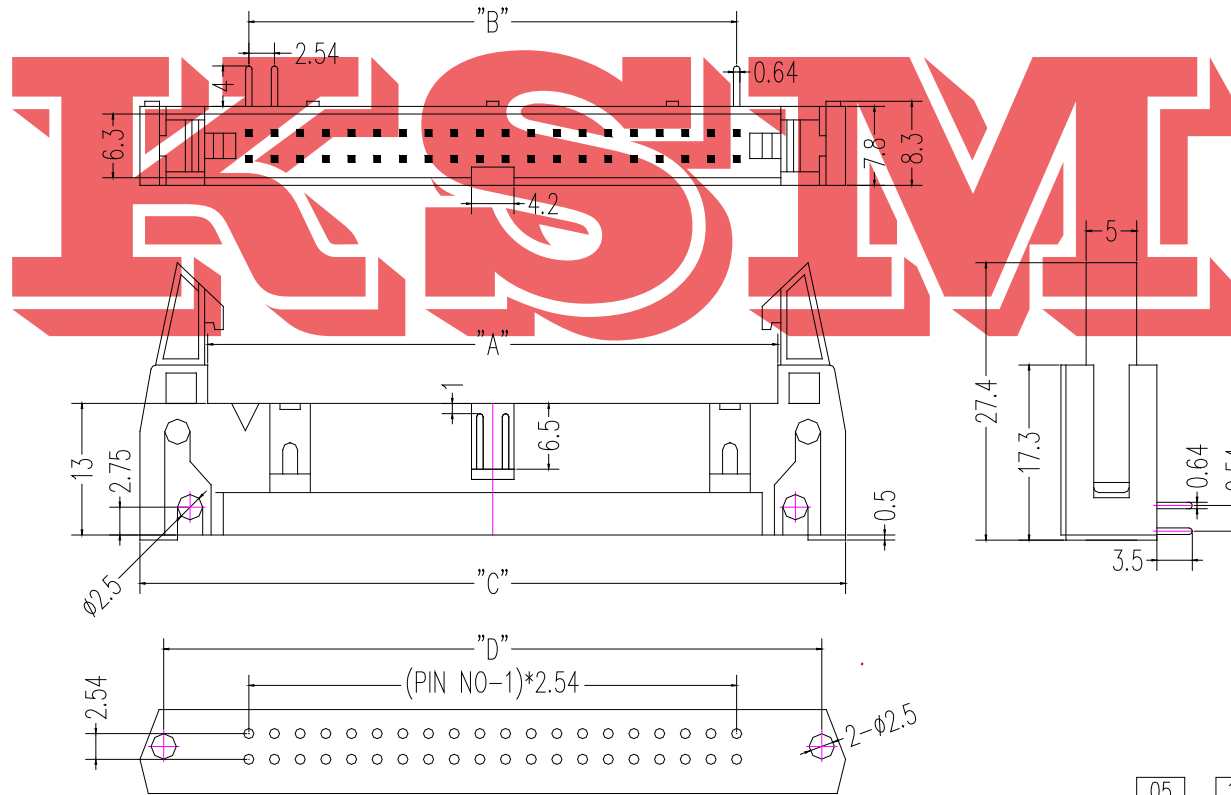

Material:
Housing: 30%Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:
Current Rating : 3 AMP.
Dielectric Withstanding Voltage : AC 1000V for 1 minute.
Insulator Resistance : 1000M Ω min. At DC 500V.
Contact Resistance : 20m Ω max. At DC 100mA.
Operating Temperature : -40 $^{\circ}$ C ~ +105 $^{\circ}$ C.

P.C.Board Layout

Number of contacts	Part NO		Dimension			
	Color: Grey	Color: Black	"A" ± 0.2	"B" ± 0.1	"C" ± 0.2	"D" ± 0.25
10	32 110 172	32 110 272	18.00	10.16	32.00	27.60
14	32 114 172	32 114 272	23.10	15.24	37.00	32.70
16	32 116 172	32 116 272	25.60	17.78	39.40	35.00
20	32 120 172	32 120 272	30.70	22.86	44.50	40.00
26	32 126 172	32 126 272	38.40	30.48	52.20	48.00
30	32 130 172	32 130 272	43.40	35.56	57.28	53.00
34	32 134 172	32 134 272	48.55	40.64	62.40	58.00
40	32 140 172	32 140 272	56.25	48.26	70.00	65.60
50	32 150 172	32 150 272	68.80	60.96	82.60	78.00
60	32 160 172	32 160 272	81.80	73.66	95.60	91.00
64	32 164 172	32 164 272	86.80	78.74	100.58	96.00

Order Information:

05	1	X	L	100	X	01	Z
Color Type 1=Black 2=Gray	No. of pins per Row 6-64	Connector Type L=Straight L=Right Angle S=S.M.T	Con tact Plating 100=C/F 0.8u" 101=1u" 102=3u" 103=5u"	Insulator Material Option A: BK-PBT B: BK-PA66 C: BK-PA6T D: BK-PA46 E: BK-LCP F: special	spacs 01=2.54mm 02=2.0mm 03=1.27mm	Latch Type Z=LongLotch X=ShortLatch C=WithoutLatch	

Shanghai ZhouRi Electronics, CO., Ltd.
Add: No. 668 Beijing East Road
Tel: 86-21-51571121 53085565
Fax: 86-21-51571120
Http: www.ksmchina.com
E-mail: zhouri119@163.com

UNLESS OTHERWISE SPECIFIED			Right Angle Type (DC2弯针)		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION	TOLERANCE		MODEL NO.	DC2#	MATERIAL	FINISH
	DECIMAL	ANGLE				
X.X	± 0.2	$\pm 0.5^{\circ}$				
X.XX	± 0.1					
X.XXX	± 0.05					
DESIGNED			Item NO.			
CHECKED			REV.	A	SCALE	1:1
APPROVED			THE THIRD ANGLE PROJECTION		UNIT	mm
				SHEET	OF	PAGES