

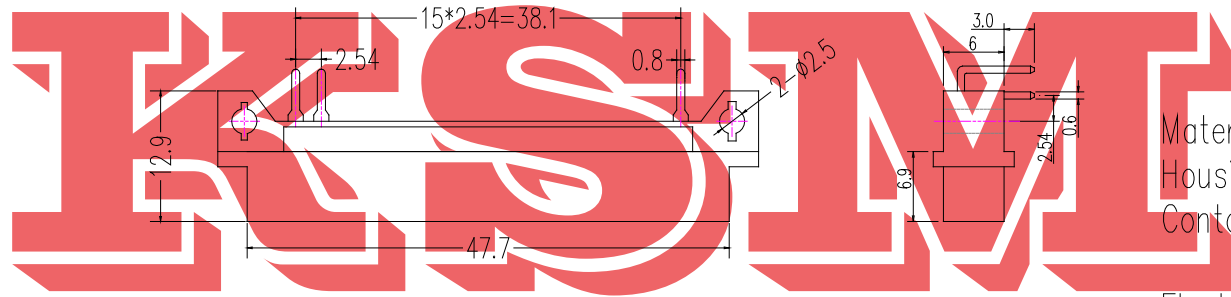


MARK	PLACES	ZONE	ECN	DATE

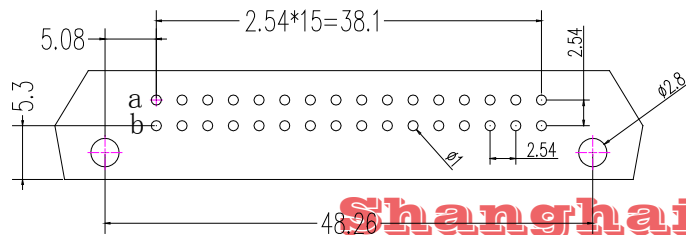

Material:
Housing: 30%Glass filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:
Current Rating : 2 AMP.
Dielectric Withstanding Voltage : AC 1000V for 1minute.
Insulator Resistance : 1000M Ω min. At DC 500V.
Contact Resistance : 30m Ω max. At DC 100mA.
Operating Temperature : -55 $^{\circ}$ C ~ +105 $^{\circ}$ C.

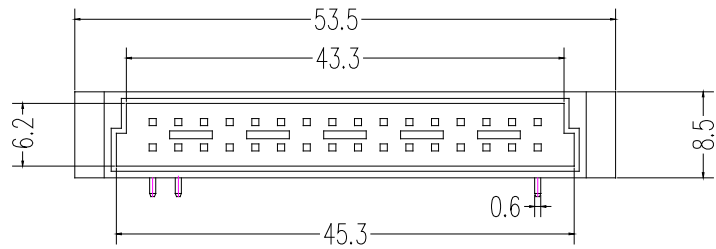

Number of contacts	Contact arrangement	Part NO.
32	a, b	9001-35321C

Shanghai ZhouRi Electronics CO.Ltd.

Add: No.668 Beijing East Road

Tel: 86-21-51571121 53085565

PCB LAYOUT (RECOMMENDED)

(TOP VIEW TOL: ± 0.05)

Fax: 86-21-51571120

Http: www.ksmchina.com

E-mail: zhouri11@163.com

UNLESS OTHERWISE SPECIFIED TOLERANCE			9001-35321C	上海洲日电子有限公司		
DIMENSION	DECIMAL	ANGLE		Shanghai ZhouRi Electronics CO.,LTD.		
X.X	± 0.3	$\pm 0.5^{\circ}$	MODEL NO.	欧式插座	MATERIAL	FINISH
X.XX	± 0.2	$\pm 0.5^{\circ}$	DWG. NO.	ZR-DIN-015	COLOR	QUANTITY
X.XXX	± 0.1		DESIGNED	Item NO.		
X.XXXX	± 0.05		CHECKED	REV. A	SCALE	1:1
			APPROVED	THE THIRD ANGLE PROJECTION		UNIT mm
						SIZE A4
						SHEET OF PAGES