


MARK	PLACES	ZONE	ECN	DATE

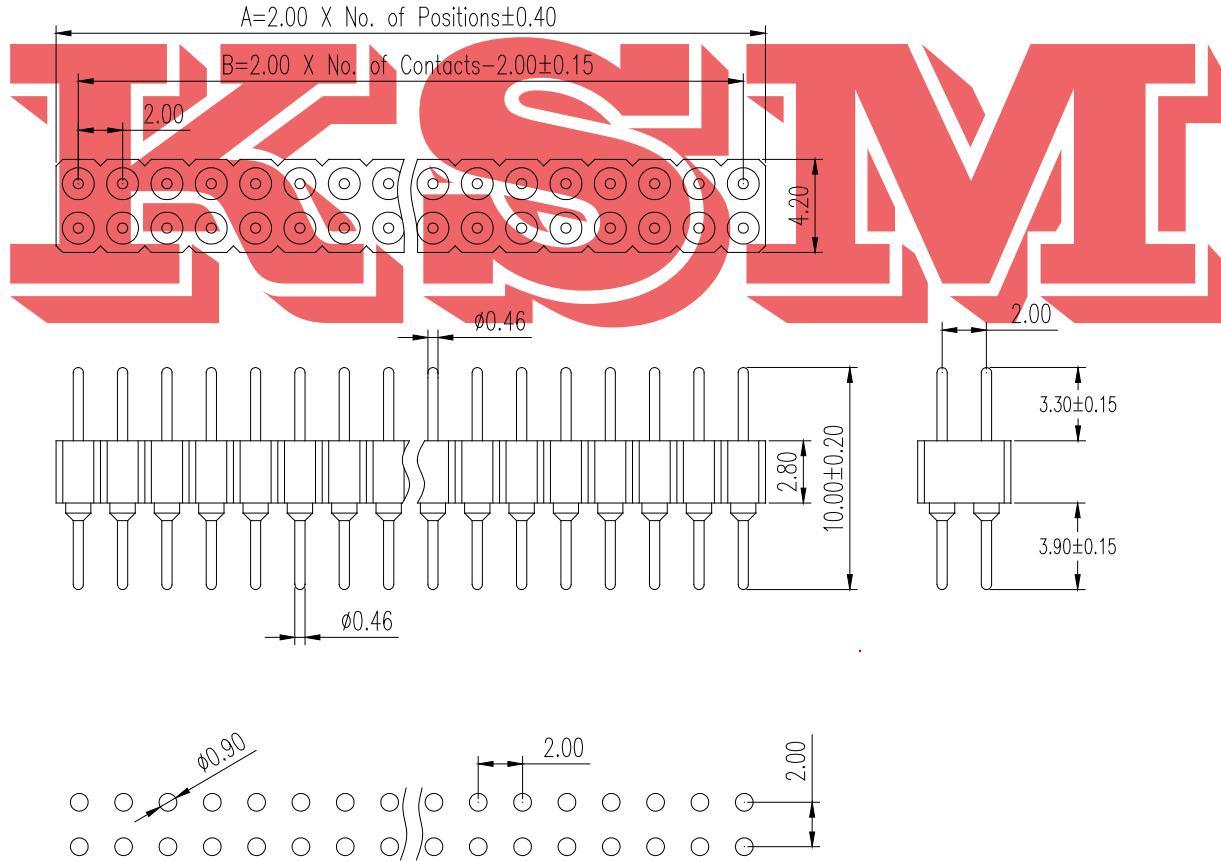

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ"Ni, 5μm/200μ"Sn

Gold Plated:2μm/80μ"Ni,0.8 μ " gold

Insulator(black): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4m\Omega$/contact

Insulation resistance: $\geq 1000M\Omega$ at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55℃ to+105℃

Tin plated:-40℃ to+105℃

Soldering temperature: +260℃,10s max

P.C.B LAYOUT

Shanghai ZhouRi Electronics.,CO.Ltd.

Add.No.668 Beijing East Road

Tel:86-21-51571121 53085565

Fax:86-21-51571120

Http://www.ksmchina.com

E-mail:zhouri11@163.com

07	XX	X	X	X	X	XXXXX
No. of Positions XX Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Cltp plated	Pin length(mm)
0 No	1 1.27mm	1 1.90mm	1 Single row	0 No	0 No	1000A 10.0mm
2 2.54mm	2 2.00mm	2 2.00mm	2 Double row	1 In150μ"	1 In150μ"	Special
3 7.62mm	3 2.80mm	3 2.80mm	3 Open-Front	2 In200μ"	2 In200μ"	
4 10.16mm	4 3.00mm	4 3.00mm	4 W/o bar	3 G/F	3 G/F	
5 2.00mm	5 4.00mm	5 4.00mm	5 Special	4 Gold3μ"	4 Gold3μ"	
6 15.24mm	6 7.00mm	6 7.00mm		5 Gold10μ"	5 Gold10μ"	
9 22.86mm				6 Gold15μ"	6 Gold15μ"	
S Special		s Special		S Special	S Special	

UNLESS OTHERWISE SPECIFIED			2.0mmPitch SIP Sockets		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
TOLERANCE			Double Row Straight			
DIMENSION	DECIMAL	ANGLE	Pin Length 10.0mm			
	X.X	±0.2	MODEL NO. (C) 圆孔插座		MATERIAL	FINISH
X.XX	±0.1	±0.5	DWG. NO. ZR-IC-021		COLOR	QUANTITY
X.XXX	±0.05		Item NO.			
DESIGNED			REV.	A	SCALE	1:1
CHECKED			THE THIRD ANGLE PROJECTION	SHEET OF		PAGES
APPROVED					UNIT	mm
				SIZE	A4	