
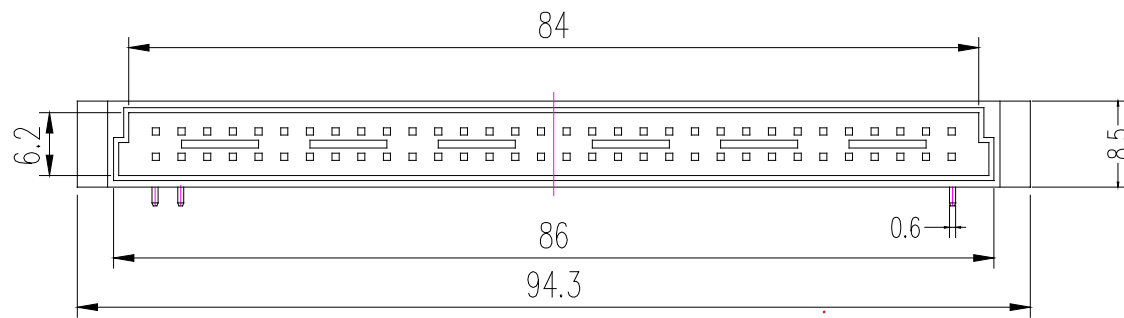


MARK	PLACES	ZONE	ECN	DATE

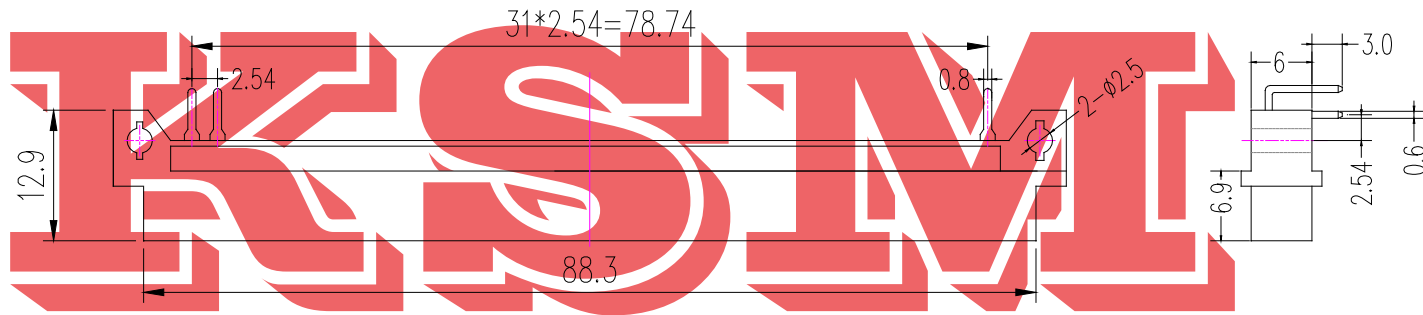

Material:

Housing: 30%Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:


Current Rating : 2 AMP.

Dielectric Withstanding Voltage : AC 1000V for 1minute.

Insulator Resistance : 1000MΩ min. At DC 500V.

Contact Resistance : 30mΩmax.At DC 100mA.

Operating Temperature : -55℃~ +105℃.

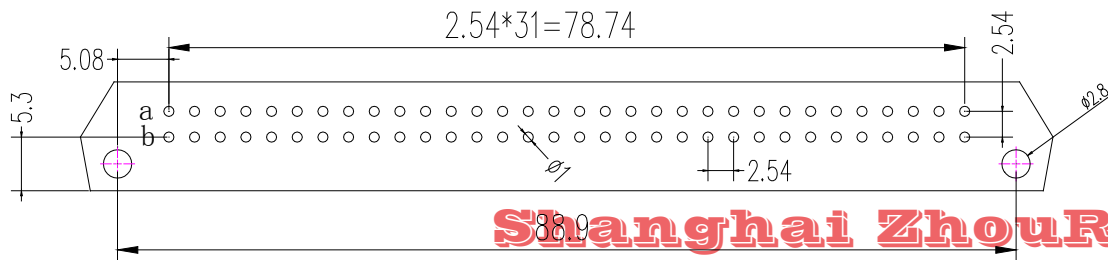

Shanghai ZhouRi Electronics.,CO.Ltd.

Add.No.668 Beijing East Road

Tel:86-21-51571121 53085565

Fax:86-21-51571120

Http:www.ksmchina.com

E-mail:zhouri11911@163.com

PCB LAYOUT (RECOMMENDED)

(TOP VIEW TOL: ±0.05)

Number of contacts	Contact arrangement	Part NO.
64	a. b.	9001-31641C
32	a. b. (2.4.6....)	9001-31641C

UNLESS OTHERWISE SPECIFIED TOLERANCE		
DIMENSION	DECIMAL	ANGLE
X.X	±0.3	±0.5°
X.XX	±0.2	±0.5°
X.XXX	±0.1	±0.5°
X.XXXX	±0.05	±0.5°
DESIGNED		
CHECKED		
APPROVED		

9001-31641C	
MODEL NO.	欧式插座
DWG. NO.	ZR-DIN-022
Item NO.	
REV.	A
SCALE	1:1
THE THIRD ANGLE PROJECTION	

上海洲日电子有限公司	
Shanghai ZhouRi Electronics CO.,LTD.	
MATERIAL	FINISH
COLOR	QUANTITY
UNIT	mm
SIZE	A4
SHEET	PAGES