

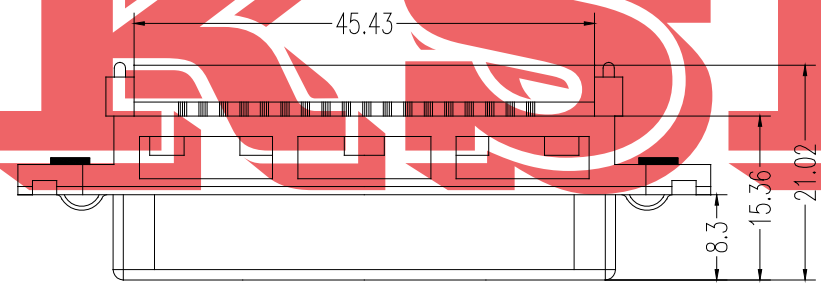
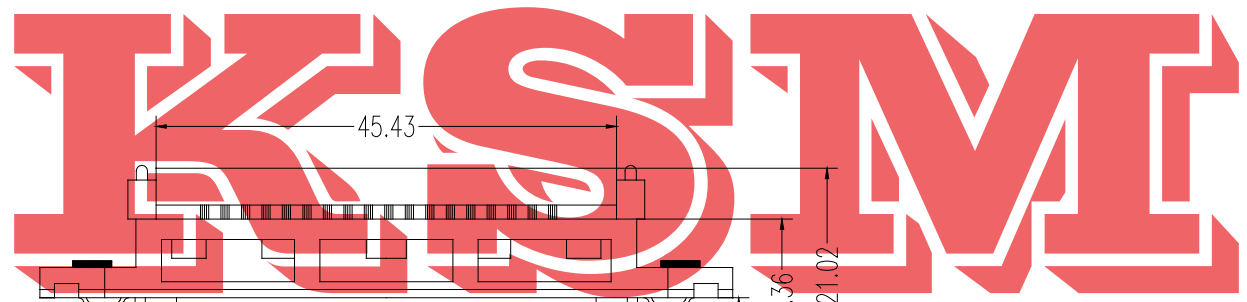


MARK	PLACES	ZONE	ECN	DATE



NOTE  
MATERIAL  
INSULATOR: PBT +30%GF  
CONTACTS:BRASS  
SHELL: SPCD  
CONTACT PLATING: GOLD PLATING OVER NICKEL  
ELECTRICAL SPECIFICATION  
CURRENT RATING: 3A;  
VOLTAGE RATING: 40V;  
CONTACT RESISTANCE: 20mΩ MAX.  
INSULATION RESISTANCE:3000MΩ MIN 500V DC.  
DIELECTRIC WITHSTANDING VOLTAGE:1000V AC.  
ENVIRONMENTA  
OPERRATING TEMPERATURE: -50℃~105℃.

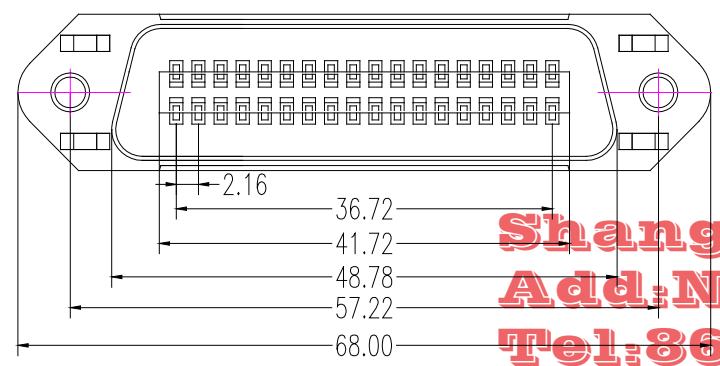

**Shanghai ZhouRi Electronics.,CO.Ltd.**  
**Add:No.668 Beijing East Road**  
**Tel:86-21-51571121 53085565**  
**Fax:86-21-51571120**  
**Http:www.ksmchina.com**  
**E-mail:zhouri11@163.com**

UNLESS OTHERWISE SPECIFIED			57F40360压排式		上海洲日电子有限公司	
DIMENSION	TOLERANCE		MODEL NO.	Shanghai ZhuoRi Electronics CO.,LTD.		
	DECIMAL	ANGLE		MATERIAL	FINISH	
X.X	±0.2	±0.5°	DWG. NO.	ZR-57-024	QUANTITY	
X.XXX	±0.1		Item NO.			
X.XXX	±0.05		REV.	A	SCALE	
DESIGNED			THE THIRD ANGLE PROJECTION	1:1	UNIT	
CHECKED				mm	SIZE	
APPROVED				SHEET	PAGES	