


L	C
7.2	3.85
8	4.85
9	5.85
10	6.85
11	7.85
12	8.85
13	9.85
14	10.85
15	11.85
16	12.85
17	13.85
18	14.85
19	15.85
20	16.85

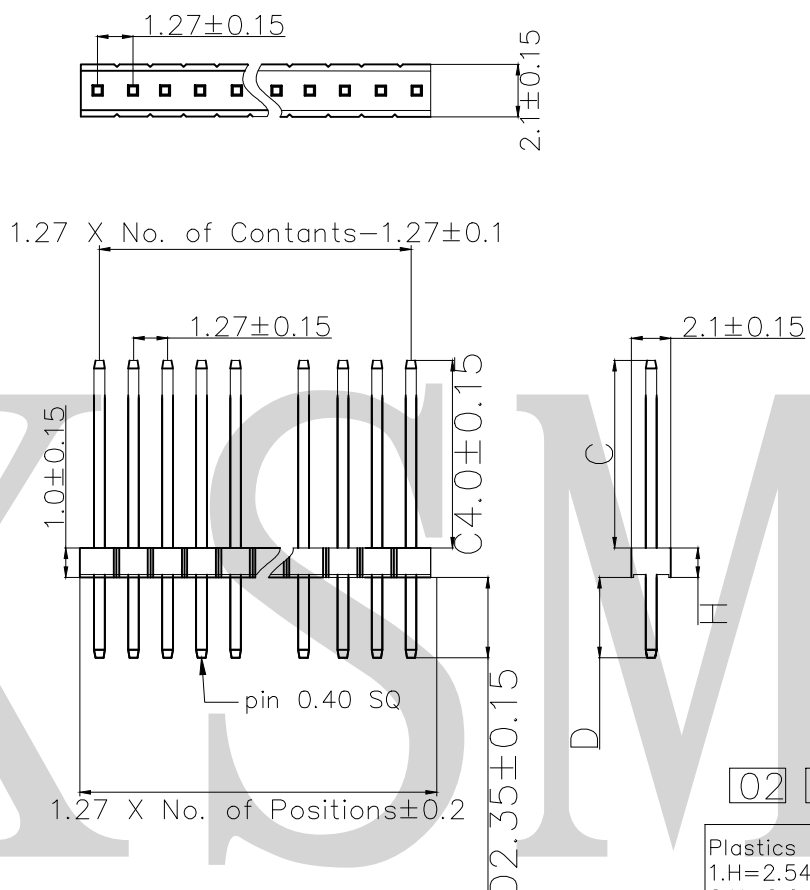

材料Material

原料Insulator: PA6T, (UL 94V-0)

相关材料Related Material: Brass

表面涂层Surface Coating: Gold Over Nickel

规格Specification

额定电流Current rating: 1AMP

耐压Dielectric Withstanding Voltage: 500v Ac Min


绝缘电阻Insulation Resistance: 1000MΩ min

接触电阻Contact resistance: 30MΩ Max

工作温度Operating Temperature: -45℃ ~ +105℃

Order Information:

02	X	XX	X	XX/XXX	XX	X	XX
Plastics Height 1.H=2.54mm 2.H=2.0mm 3.H=1.0mm	No. of Pins Per Row 1X40 1-40	Connector Type I= Straight L= Right Angle S= S.M.T	Pin Length XX=C+D+H XXX=C+D+H+E	Contact Plating 100=G/F 0.8u" 101=1u" 102=3u" 103=5u"	Insulator Material Option A: BK-PBT B: BK-PA66 C: BK-PA6T D: BK-PA46 E: BK-LCP F: Special	Space 01=2.54mm 02=2.0mm 03=1.27mm	

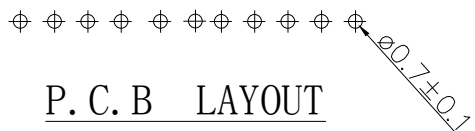

Needle Length 7.2-20.00(mm)

Unless Otherwise Specified		1.27mm Pin Header, single Row .Straight		上海洲日电子有限公司 Shanghai Zhouri Electronics CO.,LTD 上海康司玛电子设备进出口有限公司 Shanghai KangSiMa Eletronic Equipmen import and export Co.,LTD	
Dimension	Tolerance	Version Number	20140718 A/0	Unit	mm
X.	±0.3	Angle	±5°	Scale	1:1
X.X	±0.2		±3°		
X.XX	±0.15				
Designed	Ma Chao	Drawing Number	ZR20140718-005		
Checked	Li zhen	REV	A		
Approved	Fan Hao Hua	The Third Angle Projection			A4
				Sheet Of Pages	