
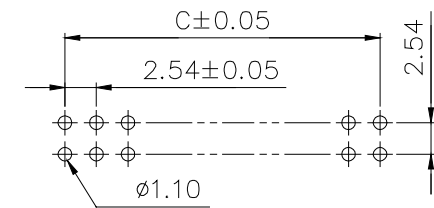
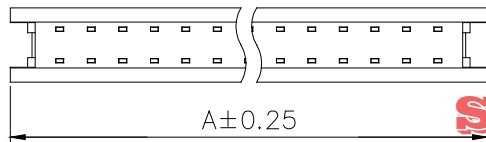
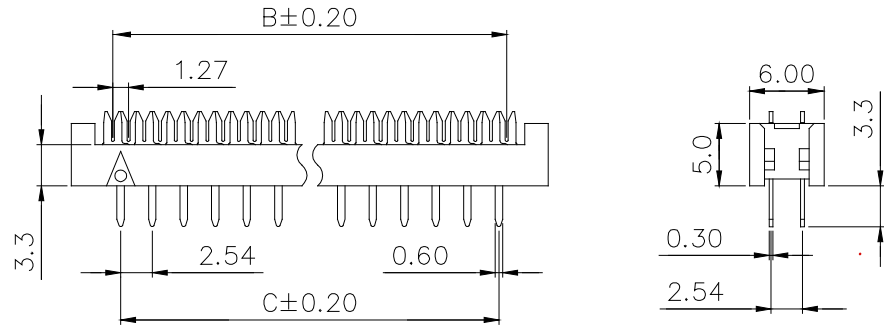


| MARK | PLACES | ZONE | ECN | DATE |
|------|--------|------|-----|------|
| | | | | |

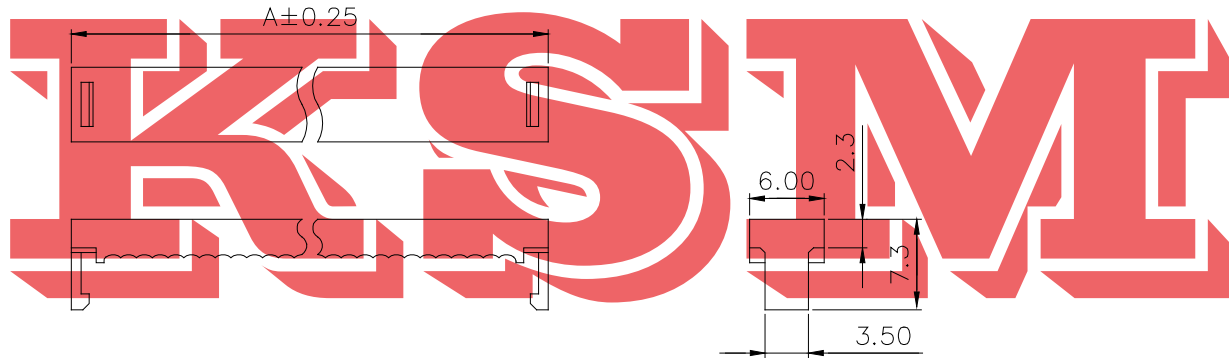

RECOMMEND P.C. BOARD LAYOUT

Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy.
 Contact Plated: Gold or Tin over Nickel Plated.

Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000MΩ Min. at DC 500V.
 Contact Resistance: 15mΩ Max..
 Operating Temperature: -40°C ~ +105°C.

| Pos. | Dim. A | Dim. B | Dim. C |
|------|--------|--------|--------|
| 6 | 13.07 | 6.35 | 5.08 |
| 8 | 15.61 | 8.89 | 7.62 |
| 10 | 18.15 | 11.43 | 10.16 |
| 12 | 20.69 | 13.97 | 12.70 |
| 14 | 23.23 | 16.51 | 15.24 |
| 16 | 25.77 | 19.05 | 17.78 |
| 18 | 28.31 | 21.59 | 20.32 |
| 20 | 30.85 | 24.13 | 22.86 |
| 24 | 35.93 | 29.21 | 27.94 |
| 26 | 38.47 | 31.75 | 30.48 |
| 30 | 43.55 | 36.83 | 35.56 |
| 34 | 48.63 | 41.91 | 40.64 |
| 36 | 51.17 | 44.45 | 43.18 |
| 40 | 56.25 | 49.53 | 48.26 |
| 50 | 68.95 | 62.23 | 60.96 |
| 60 | 81.65 | 74.93 | 73.66 |
| 64 | 86.73 | 80.01 | 78.74 |

Shanghai ZhouRi Electronics CO., Ltd.
Add: No. 668 Beijing East Road
Tel: 86-21-51571121 53085565

Fax: 86-21-51571120
Http: www.ksmchina.com
E-mail: zhouri11911@163.com

| UNLESS OTHERWISE SPECIFIED TOLERANCE | | | 2.54mm Transition IDC Connector | 上海洲日电子有限公司 Shanghai ZhouRi Electronics CO., LTD. | | | | | | | |
|--------------------------------------|---------|-------|---------------------------------|---|----------|----------|-----|------|-------|------|-------|
| DIMENSION | DECIMAL | ANGLE | | | | | | | | | |
| X.X | ±0.3 | ±0.5 | MODEL NO. | IDC | MATERIAL | FINISH | | | | | |
| X.XX | ±0.2 | ±0.5 | DWG. NO. | ZR-IDC-006 | COLOR | QUANTITY | | | | | |
| X.XXX | ±0.1 | ±0.5 | DESIGNED | Item NO. | | | | | | | |
| X.XXXX | ±0.05 | ±0.5 | CHECKED | REV. | A | SCALE | 1:1 | UNIT | mm | SIZE | A4 |
| | | | APPROVED | THE THIRD ANGLE PROJECTION | | | | | SHEET | OF | PAGES |