

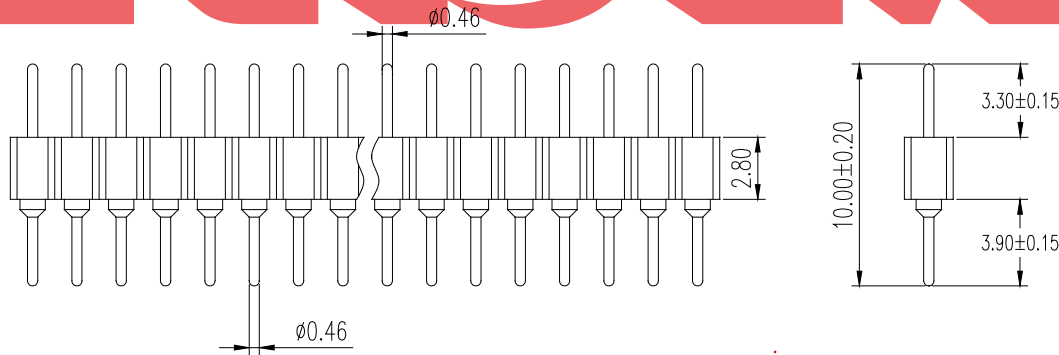


MARK	PLACES	ZONE	ECN	DATE

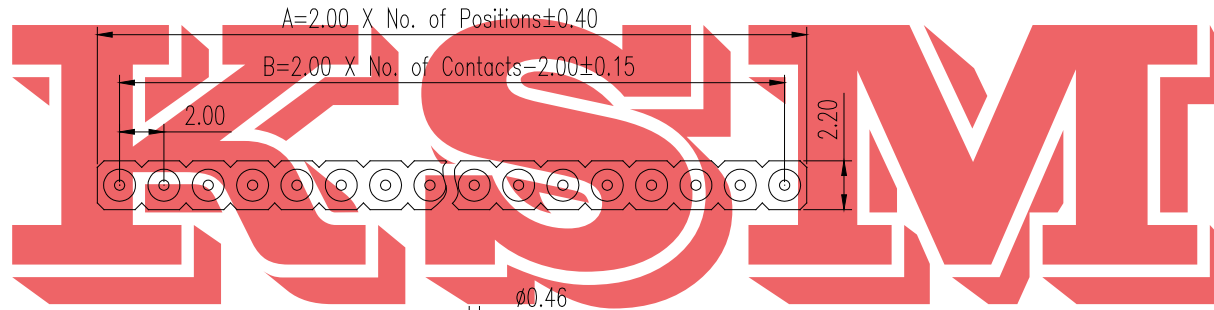

P.C.B LAYOUT

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2 μ m/80 μ "Ni, 5 μ m/200 μ "Sn

Gold Plated:2 μ m/80 μ "Ni,0.8 μ " gold

Insulator(black): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: <4m Ω /contact

Insulation resistance: \geq 1000M Ω at V=100V

Operating voltage: 60VAC/DC

Mechanical:

Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55 $^{\circ}$ C to+105 $^{\circ}$ C

Tin plated:-40 $^{\circ}$ C to+105 $^{\circ}$ C

Soldering temperature: +260 $^{\circ}$ C,10s max

Shanghai ZhouRi Electronics.,CO.Ltd.

Add.No.668 Beijing East Road

Tel:86-21-51571121 53085565

Fax:86-21-51571120

Http://www.ksmchina.com

E-mail:zhouri119110163.com

07	XX	X	X	X	X	XXXXX
No. of Positions XX Positions	Dip Spacing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 1 1.90mm 2 2.00mm 3 2.80mm 4 3.00mm 5 4.00mm 6 7.00mm S Special	Insulator type 1 Single row 2 Double row 3 Open front 4 W/o bar 5 Special	Pin Plated 0 No 1 Tin150 μ " 2 Tin200 μ " 3 G/F 4 Gold15 μ " 5 Gold10 μ " 6 Gold15 μ " S Special	Clip plated 0 No 1 Tin150 μ " 2 Tin200 μ " 3 G/F 4 Gold3 μ " 5 Gold10 μ " 6 Gold15 μ " S Special	Pin length(mm) 1000A 10.0mm S Special

UNLESS OTHERWISE SPECIFIED			2.0mmPitch SIP Sockets		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION TOLERANCE			Single Row Straight			
			DECIMAL	ANGLE	Pin Length 10.0mm	
X.X	± 0.2	$\pm 0.5^{\circ}$	MODEL NO. IC圆孔插座		MATERIAL	FINISH
X.XX	± 0.1		DWG. NO. ZR-IC-018		COLOR	QUANTITY
X.XXX	± 0.05		Item NO.			
DESIGNED			REV.	A	SCALE	1:1
CHECKED			THE THIRD ANGLE PROJECTION		UNIT	mm
APPROVED					SHEET	OF
					PAGES	A4