


MARK	PLACES	ZONE	ECN	DATE


端子 TERMINAL(XH/TJC3)

型号 Type	适用线规 Applicable wires	电线外径 O.D of wire ins
	mm ² AWG#	mm
HX25404-PT	0.06~0.33 28~22	1.2~1.9


HX25404-PT(5051/2510)




HX25404-Y(5051/2510)



HX25405-WAG(5051/2510)

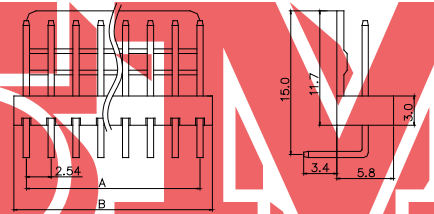

安装尺寸 MOUNTING MEASUREMENT

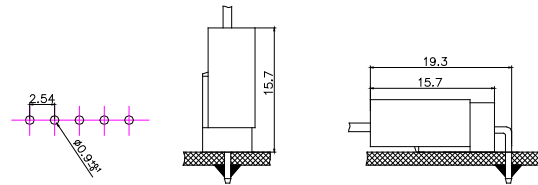

技术参数 SPECIFICATIONS

线数 (Poles): 2~24

适用线规(Applicable wires): AWG28#~22#

适应基板厚度(Applicable PC board thickness): 1.6mm

温度范围(Temperature range): -25℃~85℃

额定电压(Voltage rating): 250V Ac/Dc

额定电流(Current rating): 3A

接触电阻(Contact resistance): <0.02Ω

绝缘电阻(Insulation resistance): >1000MΩ

耐压(Withstand voltage): 1000V.Ac/1min


材料(Material):

孔座(Housing): 尼龙(Nylon)UL94V-2(0)


针座(Wafer): 尼龙(Nylon)UL94V-2(0)

端子(Terminal) 磷青铜(Phos.bronze Tin/plated)


HX25405-A(5051/2510)

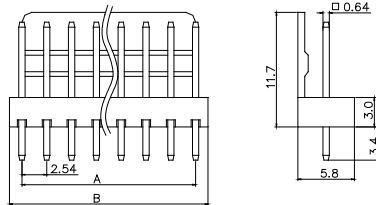

HX25405-WAQP(5051/2510)

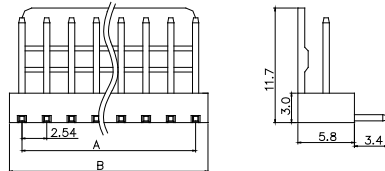

HX25405-WAHP(5051/2510)

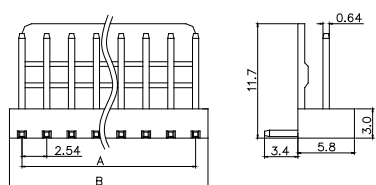

孔座 HOUSING(5051/2510)

线数 Poles	型号 Type	尺寸Dimensions(mm)	
		A	B
2	HX25404-2Y	2.54	5.74
3	HX25404-3Y	5.08	8.28
4	HX25404-4Y	7.62	10.82
5	HX25404-5Y	10.16	13.36
6	HX25404-6Y	12.70	15.90
7	HX25404-7Y	15.24	18.44
8	HX25404-8Y	17.78	20.98
9	HX25404-9Y	20.32	23.52
10	HX25404-10Y	22.86	26.06
11	HX25404-11Y	25.40	28.60
12	HX25404-12Y	27.94	31.14
13	HX25404-13Y	30.48	33.68
...
24	HX25404-24Y	58.42	61.62

针座 WAFER(5051/2510)

线数 Poles	型号 Type		尺寸Dimensions(mm)	
	直式(180°)	弯式(90°)	A	B
2	HX25405-2A	HX25405-2WA	2.54	5.08
3	HX25405-3A	HX25405-3WA	5.08	7.62
4	HX25405-4A	HX25405-4WA	7.62	10.16
5	HX25405-5A	HX25405-5WA	10.16	12.70
6	HX25405-6A	HX25405-6WA	12.70	15.24
7	HX25405-7A	HX25405-7WA	15.24	17.78
8	HX25405-8A	HX25405-8WA	17.78	20.32
9	HX25405-9A	HX25405-9WA	20.32	22.86
10	HX25405-10A	HX25405-10WA	22.86	25.40
11	HX25405-11A	HX25405-11WA	25.40	27.94
12	HX25405-12A	HX25405-12WA	27.94	30.48
13	HX25405-13A	HX25405-13WA	30.48	33.02
...
24	HX25405-24A	HX25405-24WA	58.42	66.96

Shanghai ZhouRi Electronics Co., Ltd.

Add: No. 668 Beijing East Road

Tel: 86-21-51571121 53085565

Fax: 86-21-51571120

Http: www.ksmchina.com

E-mail: zhouri119110163.com

UNLESS OTHERWISE SPECIFIED TOLERANCE			<5051/2510> Pressure Welding Bar Connector				上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.				
DIMENSION	DECIMAL	ANGLE									
X.X	±0.2	±0.5°	MODEL NO.	间距(Pitch): 2.54mm(100°)	MATERIAL		FINISH				
X.XX	±0.1		DWG. NO.	ZR-Connector-016	COLOR		QUANTITY				
X.XXX	±0.05		DESIGNED	Item NO.							
			CHECKED	REV.	A	SCALE	1:1	UNIT	mm	SIZE	A4
			APPROVED	THE THIRD ANGLE PROJECTION				SHEET	OF	PAGES	