


MARK	PLACES	ZONE	ECN	DATE

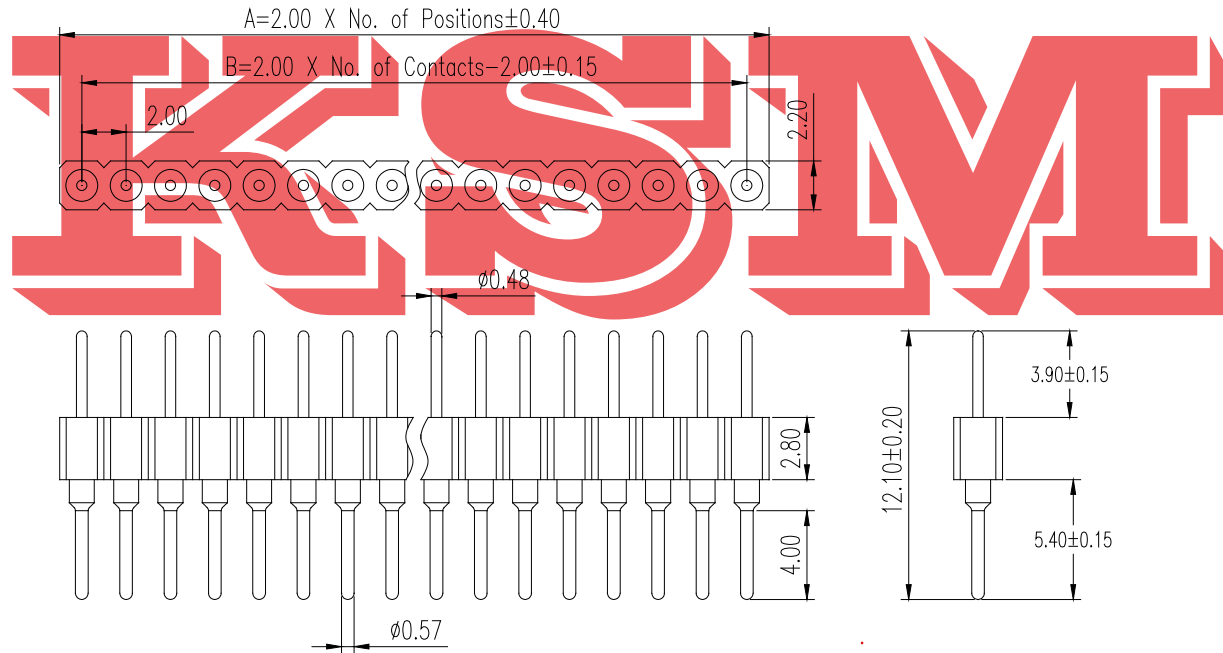

## Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated:2μm/80μ”Ni, 5μm/200μ”Sn

Gold Plated:2μm/80μ”Ni,0.8 μ ” gold

Insulator(black): PPS (UL94V-0)

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: <math>\le 4m\Omega</math>/contact

Insulation resistance:  $\ge 1000M\Omega$  at V=100V

Operating voltage: 60VAC/DC


Mechanical:

Mechanical life cycle:min.200

Operating temperatures: Gold Plated:-55℃ to+105℃

Tin plated:-40℃ to+105℃

Soldering temperature: +260℃,10s max



P.C.B LAYOUT

**Shanghai ZhouRi Electronics.,CO.Ltd.**

**Add.No.668 Beijing East Road**

**Tel:86-21-51571121 53085565**

**Fax:86-21-51571120**

**Http://www.ksmchina.com**

**E-mail:zhouri119110163.com**

07	XX	X	X	X	X	X	XXXXX
No. of Positions XX Positions	Dip Spacing 0 No 1 1.27mm 2 2.54mm 3 7.62mm 4 10.16mm 6 15.24mm 9 22.86mm S Special	Insulator Height 1 1.90mm 2 2.00mm 3 2.80mm 4 3.00mm 5 4.00mm 6 7.00mm s Special	Insulator type 1 Single row 2 Double row 3 Open frame 4 W/o bar s Special	Pin Plated 0 No 1 Tin150” 2 Tin200” 3 G/F 4 Gold3” 5 Gold10” 6 Gold15” s Special	Clip plated 0 No 1 Tin150” 2 Tin200” 3 G/F 4 Gold3” 5 Gold10” 6 Gold15” s Special	Pin length(mm) 1210A 12.10mm S Special	

UNLESS OTHERWISE SPECIFIED			2.0mmPitch SIP Sockets		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
DIMENSION TOLERANCE			Single Row Straight			
	DECIMAL	ANGLE	Pin Length 12.10mm		MATERIAL	FINISH
X.X	±0.2	±0.5°	MODEL NO.	IC 穿孔插座	COLOR	QUANTITY
X.XX	±0.1		DWG. NO.	ZR-IC-020		
X.XXX	±0.05		Item NO.			
DESIGNED			REV.	A	SCALE	1:1
CHECKED			UNIT	mm	SIZE	A4
APPROVED			THE THIRD ANGLE PROJECTION		SHEET	OF
					PAGES	