


MARK	PLACES	ZONE	ECN	DATE

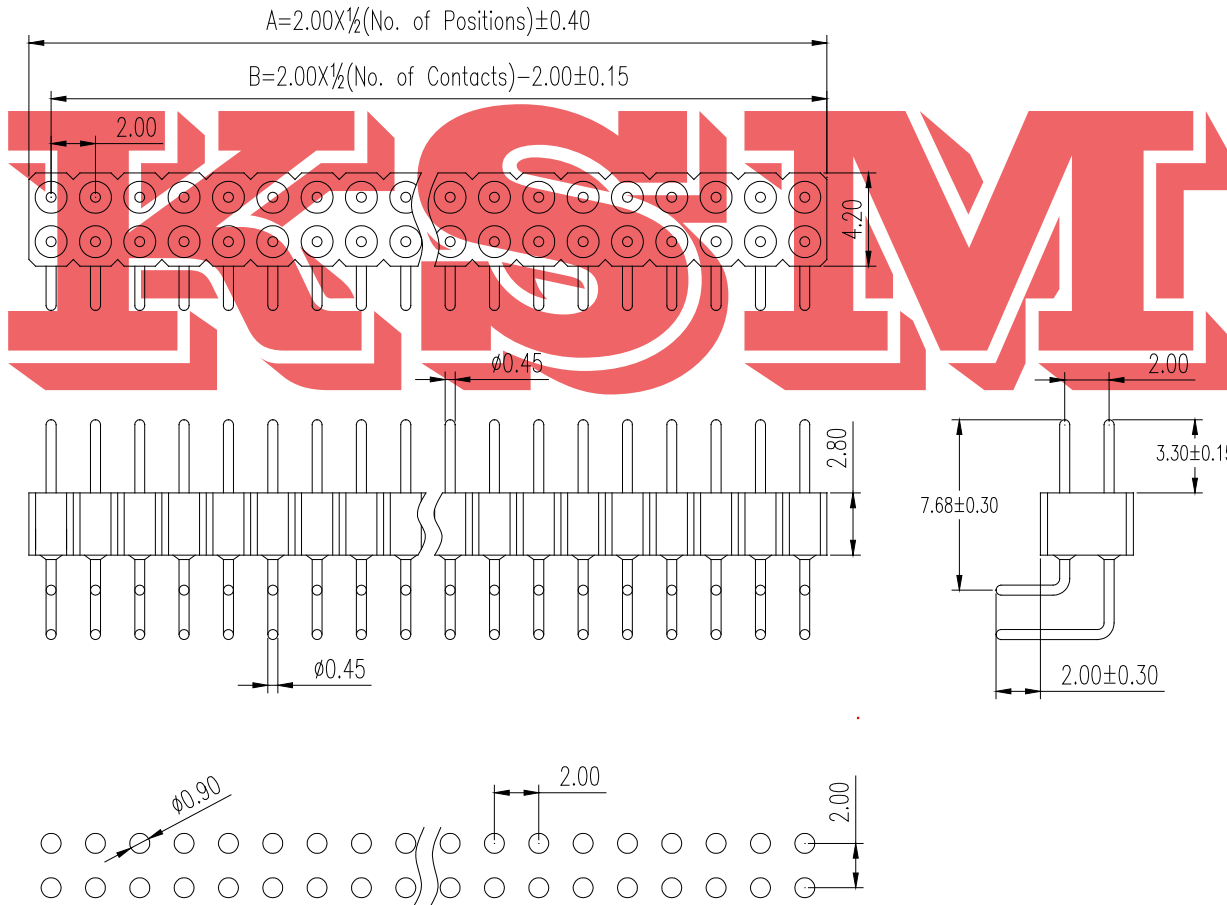

Technical Data

Material:

Pin(outer sleeve): Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin plated: $2\mu\text{m}/80\mu\text{Ni}$, $5\mu\text{m}/200\mu\text{Sn}$

Gold Plated: $2\mu\text{m}/80\mu\text{Ni}$,Full gold

Insulator(black): Black (PPS) UL94V-0

Electrical:

Current rating: 3Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insulation resistance: $\geq 1000\text{M}\Omega$ at $V=500\text{V}$

Dielectric Withstanding Voltage: 1000V AC Min

Operating voltage: 60VAC/DC

Mechanical:

Operating temperatures: Gold Plated: -55°C to $+125^\circ\text{C}$

Tin plated: -40°C to $+105^\circ\text{C}$

Soldering temperature: $+260^\circ\text{C}$,10s max.

P.C.B LAYOUT

Shanghai ZhouRi Electronics.,CO.Ltd.

Add:No. 668 Beijing East Road

TEL:86-21-51571121 53085565

Fax:86-21-51571120

Http://www.ksmchina.com

E-mail:zhouri119110163.com

07	XX	X	X	X	X	XXXX
No. of Positions XX Positions	Dip Spacing	Insulator Height	Insulator type	Pin Plated	Clip plated	Pin length (mm)
0 No	0 No	1 1.90mm	1 Single row	0 No	0 No	1056A 10.56mm
1 1.27mm	1 1.27mm	2 2.00mm	2 Double row	1 Tin150 μ "	1 Tin150 μ "	1456A 14.56mm
2 2.54mm	2 2.54mm	3 2.80mm	3 Open from	2 Tin200 μ "	2 Tin200 μ "	S Special
3 3.00mm	3 3.00mm	4 3.00mm	4 No bar	3 G/F	3 G/F	
4 10.16mm	4 10.16mm	5 4.00mm	5 Special	4 Gold3 μ "	4 Gold3 μ "	
5 2.00mm	5 2.00mm	6 7.00mm		5 Gold10 μ "	5 Gold10 μ "	
6 15.24mm	6 15.24mm	s Special		6 Gold15 μ "	6 Gold15 μ "	
9 22.86mm	9 22.86mm			s Special	s Special	
S Special	S Special					

UNLESS OTHERWISE SPECIFIED			2.00mm Pitch SIP Sockets		上海洲日电子有限公司 Shanghai ZhouRi Electronics CO.,LTD.	
TOLERANCE			Right Angle Double Row			
DIMENSION	DECIMAL	ANGLE	Pin Length 10.56/14.56mm		MATERIAL	FINISH
X.X	± 0.3	$\pm 0.5^\circ$			COLOR	QUANTITY
X.XX	± 0.2				MODEL NO.	
X.XXX	± 0.15				Dwg. No.	
DESIGNED	Item NO.					
CHECKED	REV.	A	SCALE	1:1	UNIT	mm
APPROVED	THE THIRD ANGLE PROJECTION				SHEET	OF
					PAGES	