


MARK	PLACES	ZONE	ECN	DATE

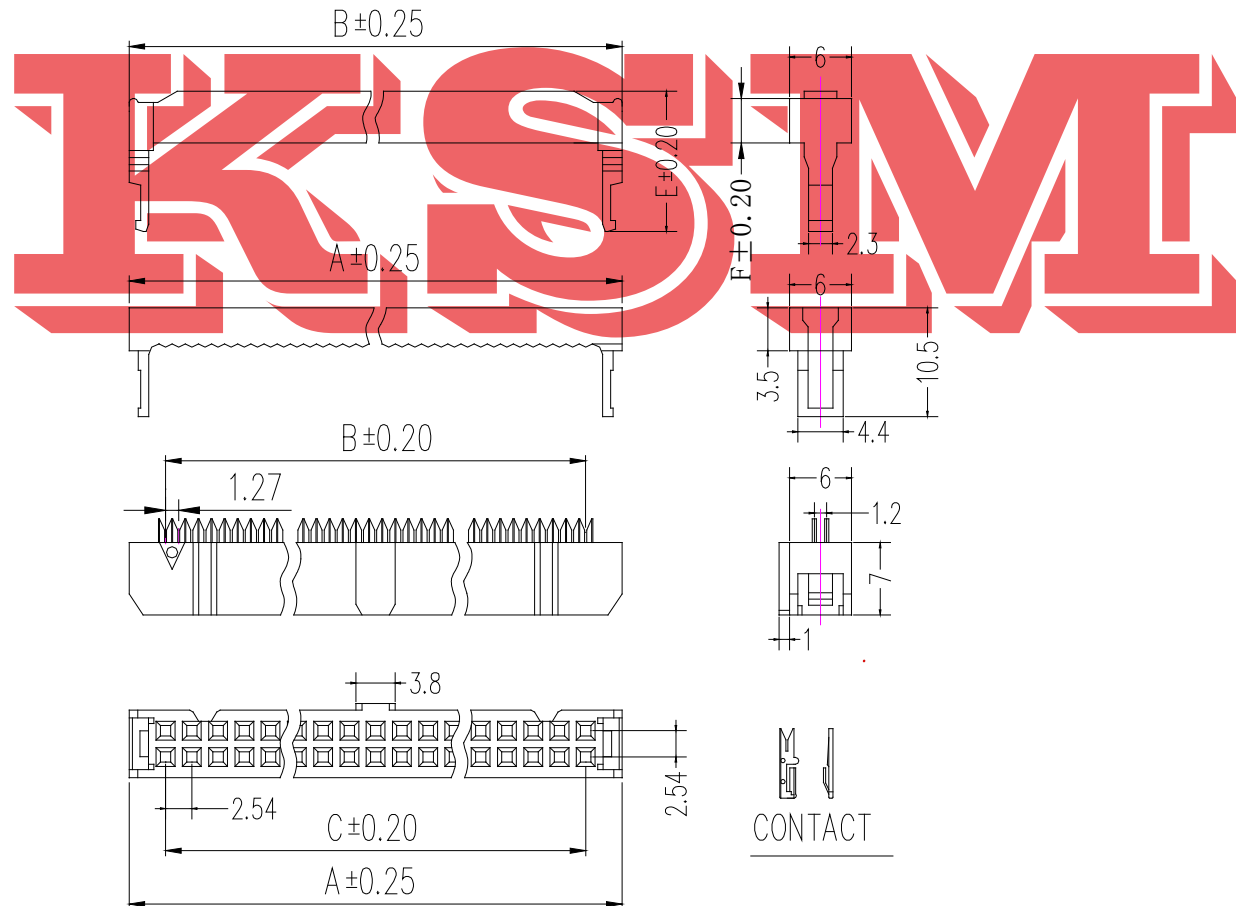

MATERIAL:
 INSULATOR: PBT+GLASS FIBER(UL94V)-0.
 CONTACT: COPPER ALLOY.
 CONTACT PLATED: GOLD OR TIN OVER NICKEL PLATED.
 ALL MATEEIAL ACCORD WITH ROHS.
 SPECIFICATION:
 CURRENT RATING: 1AMP.
 WITHSTANDING VOLTAGE: AC 500V FOR 1 MINUTE.
 INSULATION RESISTANCE: 1000 MΩ MIN. AT DC 500V.
 CONTACT RESISTANCE: 15MΩ MAX..
 OPERATING TEMPERATURE: -55℃~105℃

POS	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E	Dim.F
8	14.86	8.89	7.62	14.66	13.55	5.00
10	17.40	11.43	10.16	17.20	13.55	5.00
12	19.94	13.97	12.70	19.74	13.55	5.00
14	22.48	16.51	15.24	22.28	13.55	5.00
16	25.02	19.05	17.78	24.82	13.55	5.00
18	27.56	21.59	20.32	27.36	13.55	5.00
20	30.10	24.13	22.86	29.90	13.55	5.00
24	35.18	29.21	27.94	34.98	13.55	5.00
26	37.72	31.75	30.48	37.52	13.55	5.00
30	42.80	36.83	35.56	42.80	13.55	5.00
34	47.88	41.91	40.64	47.68	13.55	5.00
36	50.42	44.45	43.18	50.22	13.55	5.00
40	55.50	49.53	48.26	55.30	13.55	5.00
44	60.58	54.61	53.34	60.38	13.55	5.00
50	68.20	62.23	60.96	68.40	13.55	5.00
60	86.90	74.93	73.66	80.70	13.55	5.00
64	85.98	80.01	78.74	85.78	13.55	5.00

Shanghai ZhouRi Electronics CO.,LTD.
Add: No.668 Beijing East Road
Tel: 86-21-51571121 53085565
Fax: 86-21-51571120
Http: www.ksmchina.com
E-mail: zhouri11@163.com

UNLESS OTHERWISE SPECIFIED TOLERANCE			2.54mm IDC Connector		上海洲日电子有限公司	
DIMENSION	DECIMAL	ANGLE	Single Conot/with nose Dype		Shanghai ZhuoRi Electronics CO.,LTD.	
X	±0.3	±1°	MODEL NO.	IDC	MATERIAL	FINISH
XX	±0.2	±0.5°	DWG. NO.	ZR-IDC-003	COLOR	QUANTITY
XXX	±0.1		Item NO.			
XXXX	+0.05					
DESIGNED			REV.	A/O	SCALE	1:1
CHECKED			UNIT	mm	SIZE	A4
APPROVED			THE THIRD ANGLE PROJECTION			SHEET OF PAGES